

PURE SINE WAVE INVERTER

5000W 12V to 120V
Power up optimally with VEVOR!

VEVOR®



LCD Display



Remote Control



Cooling Fan



Multi-Protection



5000W Pure Sine Wave Power Inverter

12V to 120V & Aluminum Alloy Shell & Easy Remote Control

- Are you ready to confidently power up your electronics? This pure sine wave inverter is highly recommended for sensitive electronic equipment that requires cleaner AC power to operate effectively. Clear LCD display, intelligent cooling fan, and multiple protections provide reliable power conversion in a compact size and high efficiency. It allows you to power up multiple devices such as laptops, fans, fridges, microwave ovens, notebook computers, switching power supplies, coffeemakers, etc. Let's power it up together!
- 5000W Pure Sine Wave Power Inverter
- Professional LCD & LED Indicators
- Powerful Remote Control
- All-Around Security Protection
- Power Up Your Appliances


VEVOR®

Tough Equipment & Tools, Pay Less

VEVOR is a leading brand that specializes in equipment and tools. Along with thousands of motivated employees, VEVOR is dedicated to providing our customers with tough equipment & tools at incredibly low prices. Today, VEVOR has occupied markets of more than 200 countries with 10 million plus global members.

Why Choose VEVOR?

- Premium Tough Quality
- Incredibly Low Prices
- Fast & Secure Delivery
- 30-Day Free Returns
- 24/7 Attentive Service

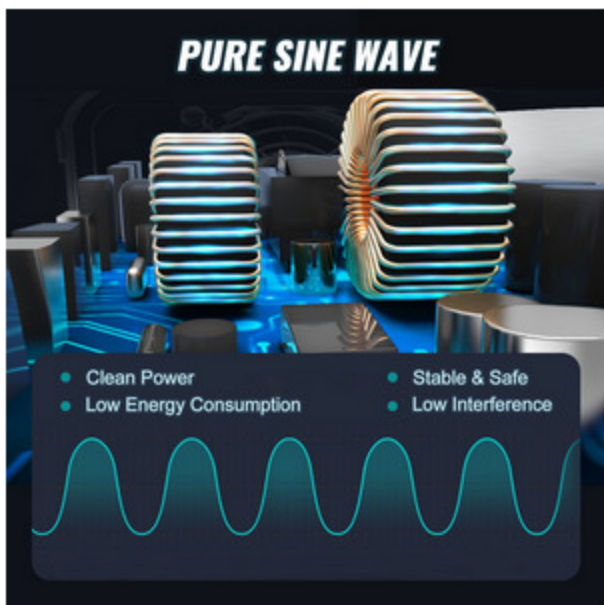

Stable Pure Sine Wave

Our power inverter dc outputs continuous stable pure sine wave by wave phase-detection, making it more reliable for providing clean power and low interference to your devices while also providing a stronger load capacity.



Ready for Anything Design

The inverter is meticulously crafted with a clear structure, facilitating you to use it effortlessly. When the internal temperature is up to 113°F/45°C, the cooling fan will rotate to reduce heat. The aluminum alloy shell has excellent oxidation and deformation resistance.



Certification & Security First

Power inverter pure sine wave has CE, FCC, RoHS, and PSE certifications for higher security and reliability. Six main protection measures keep you and your device secure and help electrical appliances operate stably.



Sturdy Aluminum Alloy Shell

The dc to ac inverter board shell is made of aluminum alloy material, which can resist oxidation, compression, vibration, and deformation. Multiple cooling grooves on the housing for easy heat dissipation.



Intelligent Fan Cooling

When the internal temperature achieves 113°F/45°C, the built-in silent cooling fan will rotate, effectively reducing operating temperatures. In addition, the fan net avoids small animals from flying into the machine.



Universal Compatibility

The RV power inverter is suitable in scenarios like working, camping, emergencies, traveling, power failures, or household use. Ideal for your electric fan, television, camera, drones, electric saw, electric grill, etc.



Specifications

- Model: GYS-5000W
- Continuous Output Power: 5000W
- Peak/Surge Power: 10000W
- DC Input Voltage: 12V DC(9.5-15.5V)
- AC Output Voltage: 120V AC ± 5%
- Output Waveform: Pure Sine Wave
- Features: LCD Display
- Outlet Type: 4 x US Outlets
- No Load Current: < 1 A
- USB Output: QC 3.0 18W
- THD: ≤ 3%
- Output Frequency: 60 Hz
- Low-voltage Shutdown: 9.5 ± 0.5V
- Low-voltage Alarm: 10.5 ± 0.5V
- Over-voltage Shutdown: 15.5 ± 0.5V
- Fuse: 40A
- Over-temperature Protection: 176 °F / 80 °C
- Over-load protection: Alarm at 125% overload, stop working after 20s
- Efficiency: ≥ 88%
- Cooling Mode: Intelligent Fan Cooling
- Built-in Cooling Fan: Starts when the internal temperature is 113 °F/ 45 °C
- Fan Operating Noise: 20-40 dB
- Remote Controller Cable Length: 9.8 ft / 3 m
- Remote Controller Dimensions(L x W x H): 3.74 x 2.76 x 0.98 in / 9.5 x 7 x 2.5 cm
- Remote Controller Connection Type: 6P6C
- Battery Cables Specifications: 25 mm² x 50 cm / 1.64 ft
- Product Dimensions(L x W x H): 17.72 x 8.07 x 6.5 in / 45 x 20.5 x 16.5 mm
- Net Weight: 22.05 lbs / 10 kg



Package Content

- 1 x Pure Sine Wave Power Inverter
- 1 x Remote Control w/Cable
- 12 x 40A Fuses
- 4 x Battery Cables(2 Red & 2 Black)
- 1 x Convenient Paste
- 1 x Convenient Paste