


## **USE AND CARE GUIDE**

#### **WINTHROP 3 LIGHT CHANDELIER**

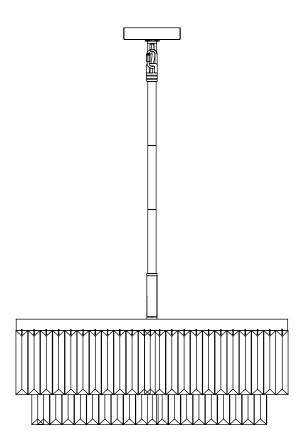

Questions, problems, missing parts? Before returning to the store, call Home Decorators Collection Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-800-986-3460

#### HOMEDEPOT.COM/HOMEDECORATORS

#### **Table of Contents**

Table of Contents	Hardware Included
Safety Information	
Warranty	Installation
Pre-Installation3	
Planning Installation	
Tools Required	Troubleshooting

### Safety Information

 Consult a qualified electrician if you have any electrical questions.



**CAUTION:** Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation. Please call our Customer Service Team at 1-800-986-3460.



WARNING: Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

### Warranty

The manufacturer warrants this lighting fixture to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alterations, neglect, or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear. The manufacturer does not warrant and specially disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor / expense costs involved in the replacement or repair of said product.


Contact the Customer Service Team at 1-800-986-3460 or visit www.homedepot.com/homedecorators.

### **Pre-Installation**


#### PLANNING INSTALLATION

- Read all instructions before installation.
- □ This fixture can be installed as an up-light or as a down-light.
- □ To avoid damaging this product, assemble it on a soft, non-abrasive surface, such as carpet or cardboard.
- □ Keep your receipt and these instructions for proof of purchase.

#### **TOOLS REQUIRED**

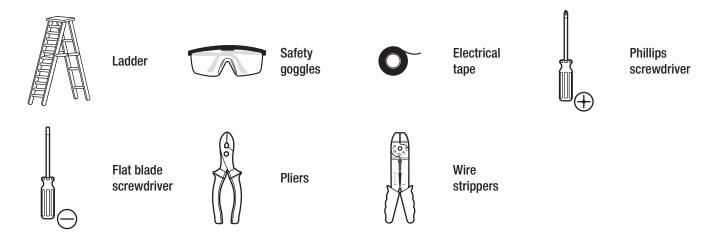


#### HARDWARE INCLUDED

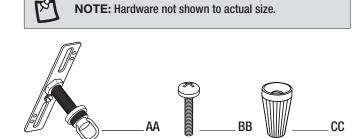



Part	Description	Quantity
AA	Mounting bracket	1
BB	Mounting screw	2
CC	Wire nut	3


# **Pre-Installation (continued)**

### **PACKAGE CONTENTS**

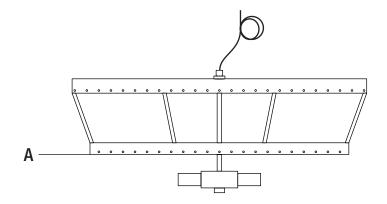









Part	Description	Quantity
Α	Light fixture	1
В	Canopy	1
С	Rod	4
D	Quick Connector	1
E	Crystal	131


#### Installation

## Assembling the light fixture

- Screw the rods (C) to the top of the light fixture (A). Make sure to feed the branch wires through the rods during assembly.
- □ Attach the quick link (D) to the top rod (C).
- □ Attach the crystals (E) to the light fixture (A).



**NOTE:** Ensure the quick connector is fully closed when installing the chain.

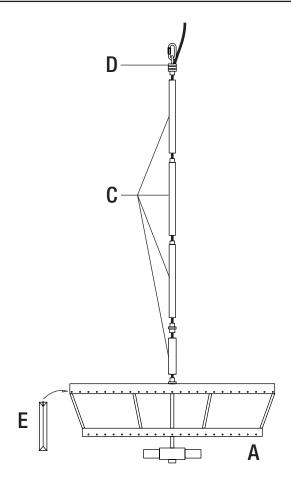


# **2** Secure the light fixture

- Attach the mounting unit (AA) to the junction box (not included) with the mounting screws (BB) and remove the pre-installed screw collar ring.
- Place the canopy (B) over the pre-installed screw collar loop on the mounting unit (AA). Turn the screw collar ring until 1/2 of the screw collar loop threads are exposed.
- Secure the quick connector (D) to the screw collar loop on the mounting unit (AA. Lower the screw collar ring and canopy (B) over the quick connector (D).
- Weave the electrical wires and ground wires through the quick connector (D), screw collar loop, canopy (B) and through the center of the mounting unit (AA).



**NOTE:** Ensure the quick connector is fully closed when installing the chain.



# **Installation (continued)**

# Making the electrical connections


- Connect the copper wire from the light fixture (A) to the mounting unit (AA) by securing it with the preinstalled ground screw.
- □ Connect the black to black (power), the white to white (neutral) and copper wire to ground wire with the wire nuts (CC) and secure with electrical tape (not included).





NOTE: If the wires from the fixture are the same color, attach the smooth wire with H markings to the black (positive) wire and the ribbed wire with N markings or letters to the white (neutral) wire.

# Securing the light fixture

□ Secure the canopy (B) to the mounting unit (AA) with the








# Installing the light bulbs

□ Install 3 E12 60-watt bulb (not included).



## **Operation**

# 1 Turning on the light

 $\hfill\Box$  Turn the light switch on to activate the fixture.

## **Care and Cleaning**

- $\hfill\Box$  Clean the lamp with a soft, dry cloth.
- □ Do not use any cleaners with chemicals, solvents, or harsh abrasives.

## **Troubleshooting**

Problem	Possible Cause	Possible Cause
The bulb will not light.	The bulb is burned out.	Replace the light bulb.
	The power is off.	Ensure the power supply is On.
	There is a faulty wire connection.	Check the wiring.
	The circuit breaker is off.	Ensure the circuit breaker is in the ON position.
The fuse blows or circuit breaker trips when the light is turned on.	There are crossed wires or the power wire is grounding out.	Check the wire connections.  Contact a qualified electrician or call the Customer Service Team at 1-800-986-3460.



Questions, problems, missing parts? Before returning to the store, call Home Decorators Collection Customer Service 8 a.m. – 7 p.m., EST, Monday – Friday, 9 a.m. – 6 p.m., EST, Saturday

1-800-986-3460

HOMEDEPOT.COM/HOMEDECORATORS

Retain this manual for future use.