


## Technical Data Sheet

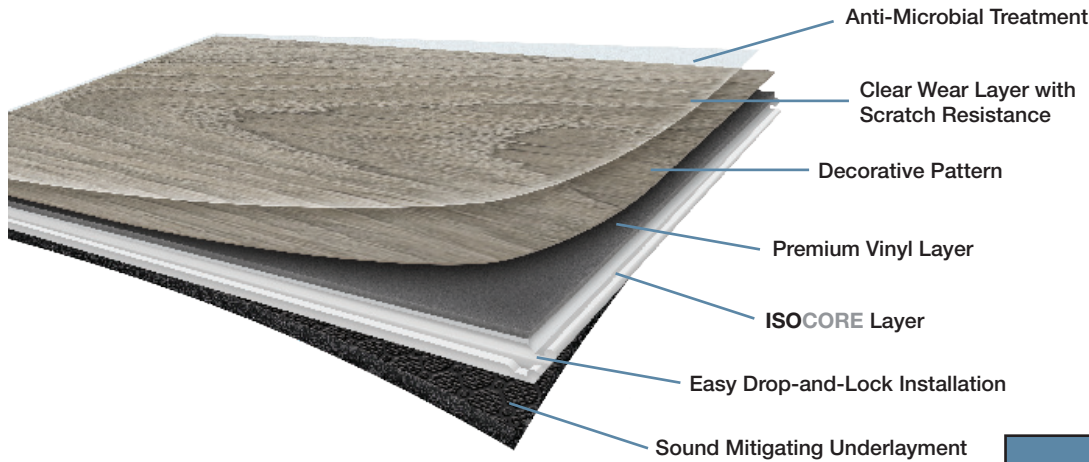

Product Information
Commercial & Residential Use
Warranty: Lifetime Residential - 25-Year Commercial

### STANDARDS - SAFETY & PERFORMANCE

Standard	Description	Requirements	Results
ASTM E648	Critical Radiant Flux (Radiant Panel)	Class I: $\geq 0.45 \text{ W/cm}^2$	Passes Requirements <sup>1</sup>
ASTM E662	Smoke Density	Flaming & Non-Flaming $\leq 450$	Passes Requirements <sup>2</sup>
ASTM D2047	Coefficient of Friction (Slip Resistance)	Not Applicable (No Official Requirements)	$\geq 0.6$ (Dry)
ASTM F970	Static Load	No Requirements if Wear Layer < 20mil	Not Applicable
SIM Test	Static Load Limit	Test to Limit ( $\pm 0.005$ "	$\geq 500$ psi
ASTM F2199	Dimensional Stability	$\leq 0.25\%$ / lineal ft.	Surpasses Requirements
ASTM F925	Chemical Resistance	No more than "Slight Change"	Surpasses Requirements
ASTM F1514	Resistance to Heat	Average $\Delta E < 8.0$	Surpasses Requirements
ASTM F1515	Resistance to Light	Average $\Delta E < 8.0$	Surpasses Requirements
ASTM G21	Antifungal Activity	Not Applicable (No Official Requirements)	Top: 0-1
ASTM F963	Heavy Metals	Refer to Standard	Passes Requirements
ASTM D7823	Phthalates	Refer to CPSIA <sup>4</sup>	Passes Requirements

### STANDARDS - SOUND

Assembly	Results		Remarks
6" Concrete Slab	IIC	54	All tested assemblies pass IBC <sup>5</sup> requirements of STC $\geq 50$ and IIC $\geq 50$ for multi-story dwellings
	STC	50	
	HIIC	57	
	$\Delta$ IIC	23	
8" Concrete Slab with Suspended Ceiling and Isolated Subfloor	IIC	Up to 72	
	STC	Up to 61	
	HIIC	Up to 80	
	$\Delta$ IIC	Not applicable	

#### Notes

- ASTM E648 - Critical Radiant Flux (Radiant Panel): Passes Requirements for Class I per International Building Code (IBC) 2018 & NFPA 101 Life Safety Code
- ASTM E662 - Smoke Density: 450 is the limit established by many state, county, and/or local building and/or fire codes, but is not set as a limit for (resilient) flooring products nationwide. Thus, Smoke Density requirements for flooring products may vary from jurisdiction to jurisdiction.
- ASTM G21 - Antifungal Activity: Top Surface (LVT Top Layer) scored 0-1 (No Growth to <10% Growth)
- CPSIA = Consumer Product Safety Improvement Act
- IBC = International Building Code