
8000 / 8000-DA SERIES HEAVY DUTY DOOR CLOSER

DIMENSIONS



PRODUCT SPECIFICATIONS

- ANSI 156.4 Grade 1
- UL / UL10C Listed, 3-Hour Fire Rating
- Compliant with ADA reduced opening force requirements
- Same mounting hole pattern as LCN 4041
- Fully adjustable power size 1~6. Factory preset Size 3
- Independent Latch, Sweep, & Backcheck Intensity Valve
- Heavy Duty Rack & Pinion
- Heat treated High Tension Piston
- High lubricity hydraulic fluid to ensure smooth operation
- 8000-DA Series equipped with Delay Action feature
- Standard arm and parallel bracket included for regular arm, top jamb, and parallel arm applications
- Standard Arm Installation allows door to swing 180°
- Heavy duty cast iron closer body. Sex Bolts included.
- Non-Handed

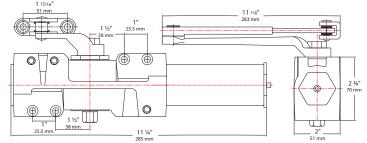

DFI ANFY[®]

RECOMMENDATIONS												
DOOR CLOSER WEIGHT			MAXIMUM SIZE OF DOOR									
Series	Door Weight	Duty	Power Size		Regular Arm	Parallel Arm						
				Interior	Exterior Swing-In	Exterior Swing-Out	Interior	Exterior Swing-Out				
8000	33-330 Lbs	Heavy	1	28"	N/A	N/A	N/A	N/A				
			2	36"	N/A	N/A	30"	N/A				
			3	42"	30"	36"	36"	30"				
			4	48"	36"	42"	42"	36"				
			5	54"	42"	48"	48"	42"				
			6	60"	48"	54"	54"	48"				

ITEM DETAILS

Model	WT/CTN	WT/CTN		Aluminum	Duro Bronze				
8000 Series Door Closer	26 Lbs.	2 Pcs	Item No.	608810	608811				
with Standard Full Cover									
8000 Series Door Closer with Delay Action (DA) &	26 Lbs.	2 Pcs	Item No.	608840	608841				
Standard Full Cover									

OPTIONAL FEATURES

- Hold open arm with parallel bracket
- Parallel rigid arm
- Hold Open CUSH Arm
- Thru bolts for metal door mounting
- Drop plates

