




# LOCKING Pattern Matching/Seam Repair Stretcher

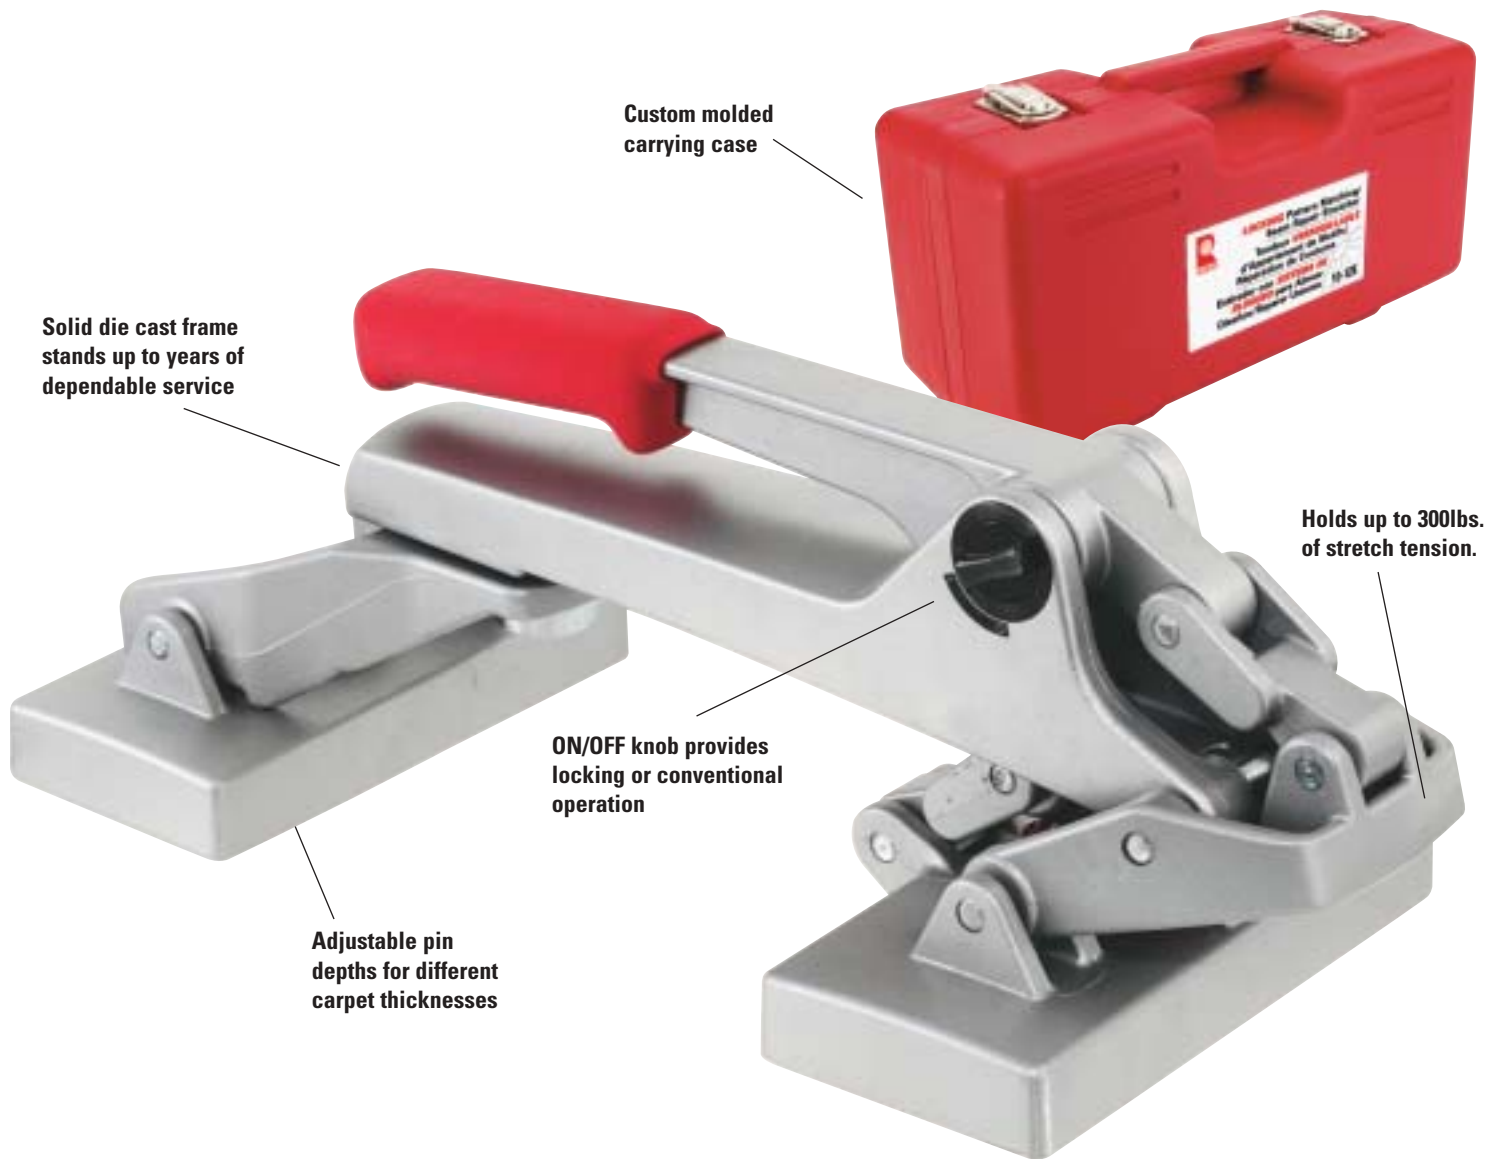

Custom molded carrying case

Solid die cast frame stands up to years of dependable service

Holds up to 300lbs. of stretch tension.

ON/OFF knob provides locking or conventional operation

Adjustable pin depths for different carpet thicknesses

# 10-128

The unique locking action enables "hands-off" seam repair. Turn the Automatic Locking Mechanism "ON" and the powerhead locks each 1/4" of pin plate travel for easy pattern alignment. Turn the locking action "OFF" and the stretcher works in the conventional "non-locking" mode.

*Roberts LOCKING Pattern Matching/Seam Repair Stretcher, making your life easier, 1/4 inch at a time!*



# LOCKING Pattern Matching/Seam Repair Stretcher



For pattern matching



For pulling trimmed edges together



ON/OFF knob provides locking or conventional operation

The 10-128 can be used in either the "automatic locking" or conventional method by setting the Lock Control as shown below. The automatic locking mechanism locks the stretcher in position approximately each 1/4" (6.5mm) of travel. The stretcher will hold this position and will not open. This enables the user to make "hands-off" seam repairs, as it is not necessary to hold the handle in position.




To use the stretcher in the "automatic locking" mode, open the stretcher, then set the Control Knob on the "O" mark.

To use the 10-128 in the conventional "non locking" mode, set the lock control on the "I" marked as shown below.



## COMMON TYPES OF MANUFACTURING DISTORTIONS

Common Name	Description
Bow	A visible distortion or wave of the pattern across the width or berth of the carpet.
Skew/Bias	A pattern distortion of the pattern not being square with either edges of the carpet.
Pattern Elongation	An increase or decrease of cumulative pattern measurements, from one breadth of carpet to the next.
Edge Deviation	A visible wavy or crooked pattern, running parallel from the edge of the carpet.

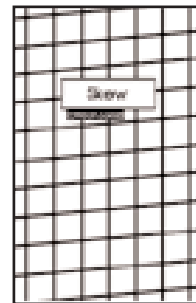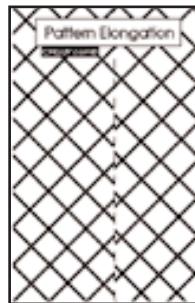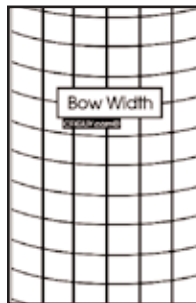

Distortion drawings courtesy of CFI

**Tolerances:** Although individual manufactures have tolerances to which their patterned products must conform, THERE ARE NO INDUSTRY STANDARDS FOR CARPET PATTERN VARIATION. Call the carpet manufacturer for their tolerances.

**Note:** Do not install carpet if a defect is visible, or if the distortion exceeds the tolerances specified by the carpet manufacturer.