


PRODUCT SPECIFICATIONS

12 in Round Puff with Motion Sensor



54074491
SKU# 1002662065

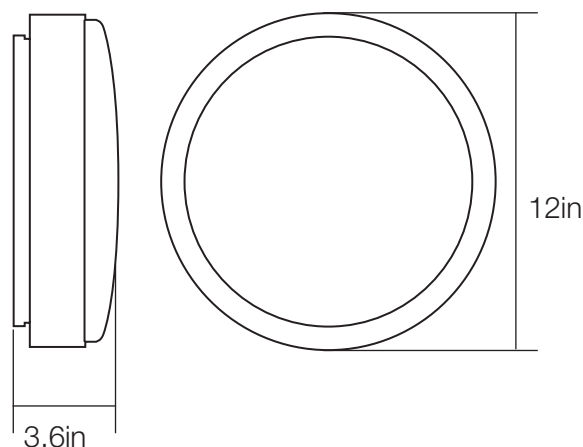

SPECIFICATIONS

Model Number	54074491
SKU	1002662065
OSMID	314010397
Power	14.5 W
AC Voltage, Frequency	120V, 60 Hz
Color Temp (nom.)	4000K
Operation Temp	-4°F ~ 113°F
CRI	80
Lumen Output (min.)	1000 lm
Dimming	NO
Lifetime Rating	L70/50000Hrs
Efficacy	68.97 lm/watt

ADVANTAGES

- Detects Motion up to 11 ft away
- 75 Watt Equivalent
- 50,000 Hours of Continuous Use
- 5 Year Warranty

APPLICATIONS

Suitable for damp locations

SURFACE MOUNT



PACKAGING

Weight (±0.5 lb)	1.1 lbs
Size (L x W x H) (±0.1 in)	12in x 12in x 3.6in
Box Dimensions	12.7in x 12.8in x 4.0in
Gross Weight	1.9 lbs
UPC	849489072210



INCLUDED IN BOX

- Wire Connector (3)
- Mounting Screw (2)

Continued on next page

Contact Information 1-877-527-0313 · WWW.HOMEDEPOT.COM


PRODUCT SPECIFICATIONS

12 in Round Puff with Motion Sensor



54074491
SKU# 1002662065

DIRECT WIRE INSTALL

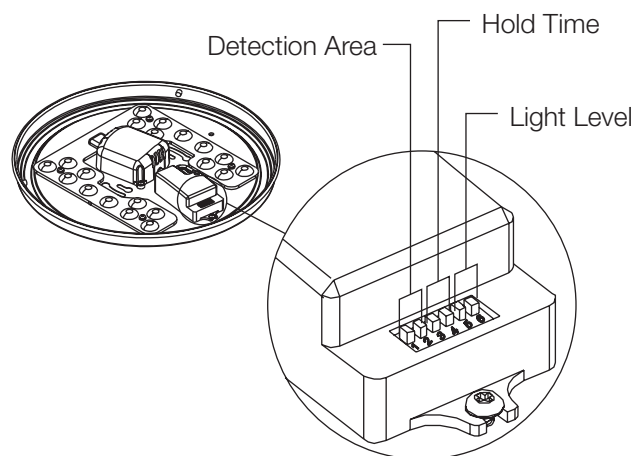

MOTION SENSOR SPECS

Detection Area				Coverage By Install Height		
	DIP 1	DIP 2		10 ft. Ceiling	9 ft. Ceiling	8 ft. Ceiling
I	●	●	100%	25 ft. x 10 ft.	24 ft. x 9 ft.	24 ft. x 8 ft.
II	●	○	75%	20 ft. x 10 ft.	20 ft. x 9 ft.	20 ft. x 8 ft.
III	○	●	50%	13 ft. x 10 ft.	12 ft. x 9 ft.	12 ft. x 8 ft.
IV	○	○	10%	0 ft. x 10 ft.	0 ft. x 9 ft.	5 ft. x 8 ft.

Hold Time			
	DIP 3	DIP 4	
I	●	●	5 sec.
II	●	○	90 sec.
III	○	●	5 min.
IV	○	○	15 min.

Photocell			
	DIP 5	DIP 6	
I	●	●	Disable
II	●	○	50 lux.
III	○	●	10 lux.
IV	○	○	2 lux.

 Default Factory Setting