



# Model: Z5570

1.6 gpf Pressure Assist, Elongated,  
Two-Piece Toilet

TAG \_\_\_\_\_

### Architectural/Engineering Specification:

Zurn Z5570 Vitreous China floor mounted, Two Piece toilet, High Efficiency 1.6 gpf / 6.0 Lpf, Pressure Assisted tank, Elongated standard Height rim and 12" Rough-in.

Zurn Z5570 utilizes EcoFlush™ technology maximize water savings and provide an ultra-quiet flush in demanding, high-traffic commercial areas that require a high performance toilet system.

### Product Features:

- 1.6 gpf (gallons per flush)
- Vitreous china
- Pressure assisted tank
- High performance EcoFlush™ technology
- Easy touch handle actuation
- Ultra quiet flush
- Siphon jet flush action
- 2-1/8" fully glazed trapway
- Operating pressure range 20-80 psi
- Elongated front rim
- Chrome plated handle
- Large water surface area
- Includes bolt caps
- Shipping weight: 95 lbs.

Note: HET 1.1 gpf and HET dual Flush 1.6/1.1 gpf pressure assist tanks also available. See models Z5571 and Z5572

### Compliance and Certification:

- ASME A112.19.2 / CSA B45.1



### Suffix Option:

- RH Vitreous China right-hand lever tank
- VL Vitreous China lid with vandal-proof lock down.

### Recommended Trim:

#### -Z5972-COMB

Closet bolt & wax ring kit.

#### -Z5958SS-EL

Elongated, white, closed front toilet seat with cover & stainless steel check hinge.

#### -Z8800-CR

Standard stop with flexible closet riser.

### Optional Trim

#### -Z5975-FLO-JR

PVC Flo-Bowl Jr. closet flange kit

See Zurn One Systems for suggested packages.

**Architectural/Engineering Approval**

Fixture dimensions meet ASME A112.19.2 / CSA B45.1 requirements.

In Canada - Consult local codes and standards.

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.




# Model: Z5570

1.6 gpf Pressure Assist, Elongated,  
Two-Piece Toilet

TAG \_\_\_\_\_

## Rough-in dimensions for Z5570

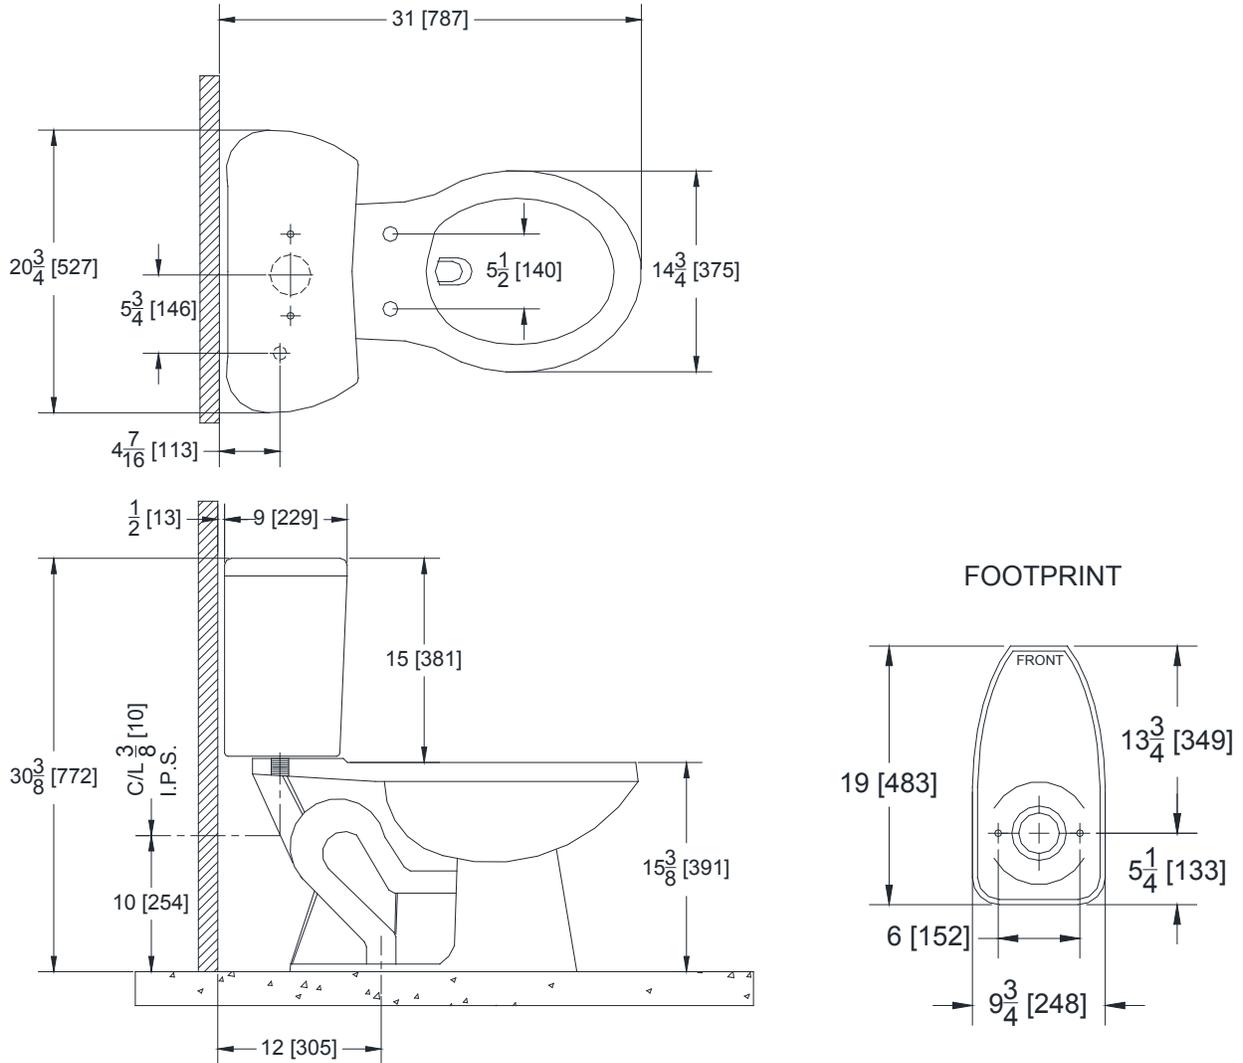

Fixture dimensions meet ASME A112.19.2 / CSA B45.1 requirements.

In Canada - Consult local codes and standards.