PRIOR TO FIRST USE


Please let the dehumidifier stand outside its packaging for **24 HOURS** before plugging it in.

During transit, the dehumidifier may have been tilted or inverted. Allowing the dehumidifier to stand for 24 hours ensures that the compressor oil settles properly after transportation. Neglecting this step could potentially affect the dehumidifier's performance and lifespan.

SAFETY PRECAUTIONS

- Place the dehumidifier on a flat surface to minimize vibration and noise.
- Before use, check the power cord for any damage. Do not operate the dehumidifier if the power cord or plug is damaged.
- Insert the three-prong plug into a matching electrically grounded outlet (120V/60Hz, at least 10A). Do not cut off the third prong or modify the power cord length.
- Avoid operating the dehumidifier in standing water and ensure the motor and wiring stay dry.
- Never immerse the dehumidifier in water or other liquids.
- Keep the dehumidifier away from heat-generating devices, flammable materials, or hazardous substances.
- Turn off and unplug the power supply before cleaning or storing the dehumidifier.
- Always grasp the plug (not the cord) to unplug.
- Do not insert fingers or other objects into the air inlet or outlet.
- Avoid sitting, standing, or placing heavy objects on the dehumidifiers.
- Disconnect the power if you notice strange sounds, odors, or smoke coming from the dehumidifier.
- Do not operate or turn off the dehumidifier by plugging in or unplugging it. Use the control panel instead.
- This dehumidifier should only be used by adults who have read the manual and understand its operation.
- This dehumidifier is not intended for use by individuals (including children) with reduced physical, sensory or mental capabilities, unless supervised or instructed by someone responsible for their safety.
- Children should be supervised to ensure that they do not play with the dehumidifier.
- Do not tilt the dehumidifier while it is operating to prevent water overflow.

PARTS IDENTIFICATION

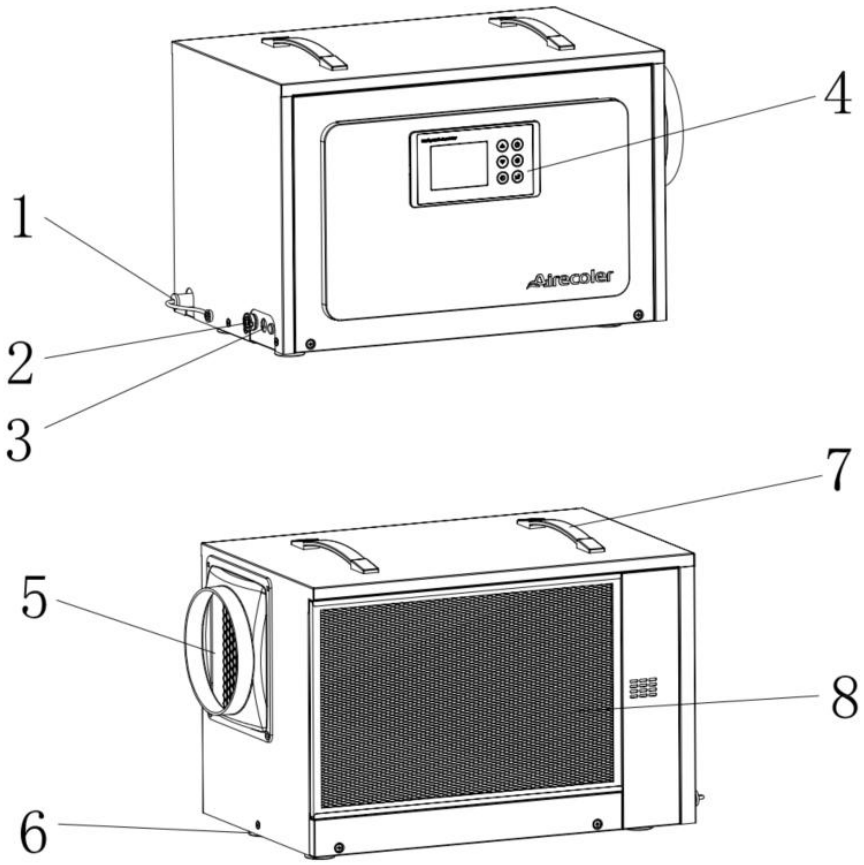


1. Gravity Drain Outlet
2. Remote Control Port
3. Power Cord Port
4. Control Panel
5. Air Outlet
6. Foot
7. Handle
8. Filter


NOTE: DO NOT OBSTRUCT THE AIR INLET OR OUTLET.

INSTALLATION INSTRUCTIONS

1. Incorrect Installations

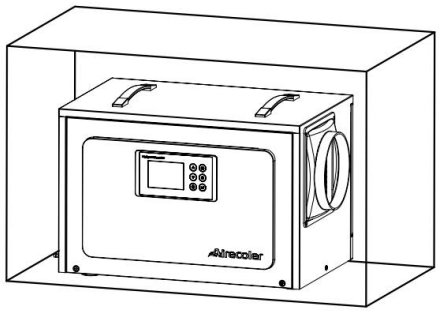

① **Small Room Installation:** The dehumidifier is installed in a room smaller than 1,500 cubic feet.

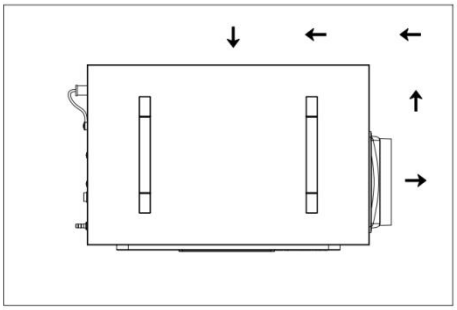


② **Obstructed Airflow:** Both the air outlet and air inlet are close to walls or other obstacles.


In either of the above 2 situations, the dry, hot air discharged by the dehumidifier would be quickly drawn back into the unit. This can interfere with the humidity sensor, leading to inaccurate or fluctuating humidity readings. As a result, the dehumidifier may cycle on and off frequently or may not operate properly.

Note: If the dehumidifier needs to be installed in a small space, set the target humidity level to 10. This will help the dehumidifier run continuously to ensure its effectiveness, regardless of the inlet humidity reading.

2. Recommended Installations

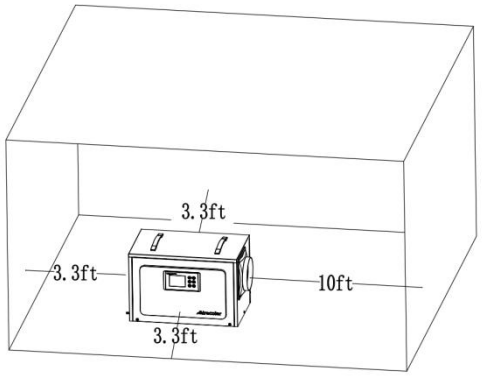

① **Adequate Clearance:** Keep the air outlet at least 10 feet from obstacles and the air inlet at least 3.3 feet from obstacles.

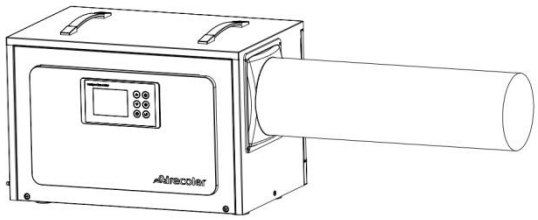

② **Duct Installation:** Attach a duct to the air outlet to direct the discharged air away from the inlet.

Following either of the above recommendations will help prevent the discharged air from being drawn back into the unit, ensuring the dehumidifier operates effectively.

3. Position Your Dehumidifier

• Position the dehumidifier horizontally during installation to minimize vibrations and noise.

• For optimal performance, operate the dehumidifier in an enclosed area with all doors and windows closed to maximize water removal efficiency.


• Keep the dehumidifier away from obstructions and ensure ample space for airflow into and out of the unit.

4. Attach the Drain Hose

• Attach the drain hose to the Gravity Drain Outlet.

• Direct the hose to a suitable drainage facility, ensuring it is positioned lower than the dehumidifier's drain outlet and free from kinks or blockages.

Illustration:

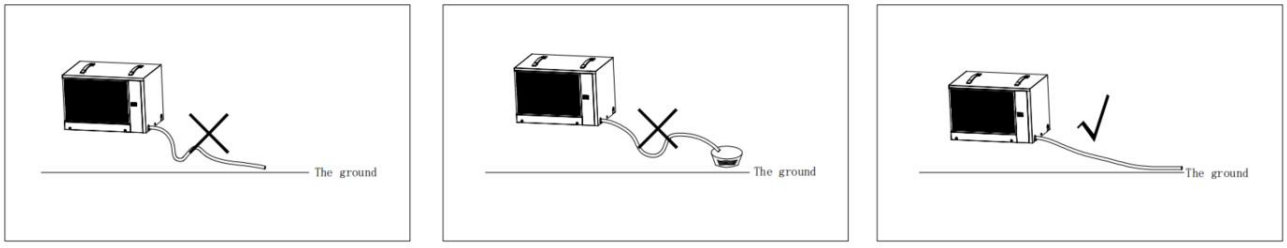

OPERATION INSTRUCTIONS

1. Plug in the Electrical Cord

IMPORTANT

Please allow the dehumidifier to sit outside the box for **24** hours before initial use.

The dehumidifier needs to be plugged into a properly grounded 120-volt outlet rated for at least 10 amps. Uncoil the power cord and firmly plug it into a suitable outlet.

NOTE: When the dehumidifier is plugged in, the ⏻ icon on the control panel display will illuminate.