

Features


- Single-function 1.75 gpm (gallons per minute) showerhead with wide-coverage spray.
- Single lever handle controls temperature setting.
- Push-button on/off controls for showerhead and spout.
- Pressure-balancing technology maintains outlet temperature within +/-3 degrees Fahrenheit during water pressure fluctuations.
- Provides temperature regulation and automatic anti-scald protection.
- Bath spout with slip-fit connection.
- Box includes: Showerhead, shower arm and flange, faceplate, spout, valve with universal 1/2" NPT male connections.

Material

- Premium material construction.
- KOHLER finishes resist corrosion and tarnishing.

Adapters, Rough-in and Extension Kits

1393859 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

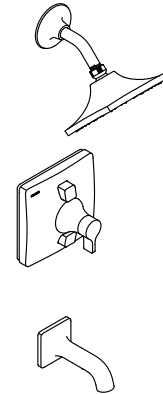

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

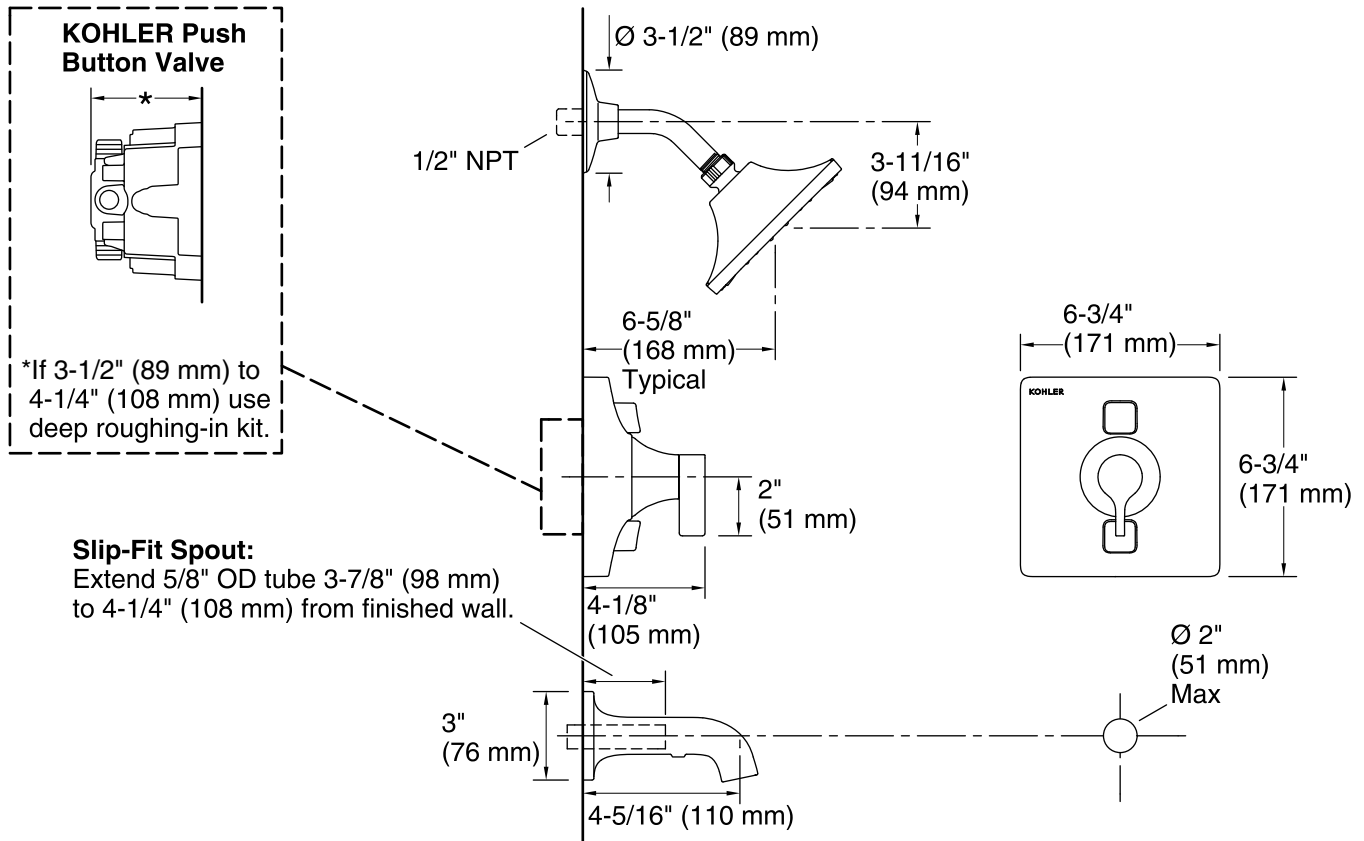

Technical Information

All product dimensions are nominal.

Valve body: Machined-brass

Drain included: No

Notes

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.