




GARAGE BENCH

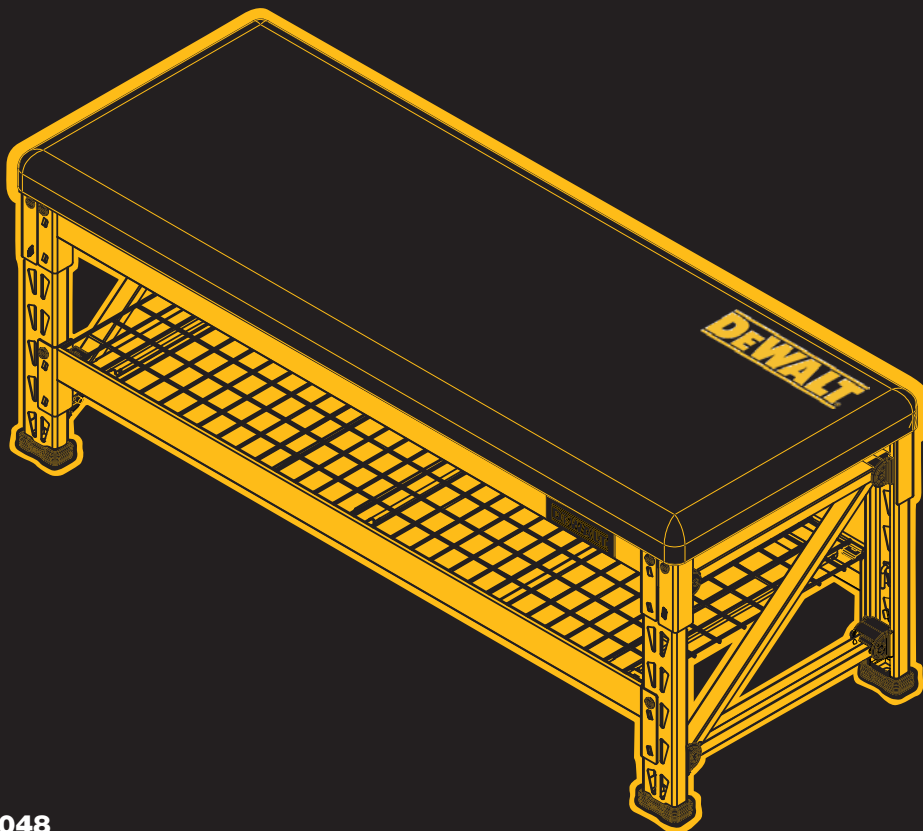

DXSTFB048

IMPORTANT:

Please read this manual carefully before assembling this garage bench and save it for reference

**INSTRUCTION
MANUAL**

TABLE OF CONTENTS

TECHNICAL SPECIFICATIONS	4
SAFETY GUIDELINES	5
PARTS LIST	6
ASSEMBLY	8
WARRANTY	11



SAVE THESE INSTRUCTIONS

This manual contains important safety and operating instructions. Read all instructions and follow them with use of this product.

TECHNICAL SPECIFICATIONS

SEAT CAPACITY	1,000 lb (454 kg) *WHEN WEIGHT IS EVENLY DISTRIBUTED
SHELF CAPACITY	1,500 lb (680 kg) *WHEN WEIGHT IS EVENLY DISTRIBUTED
HEIGHT	19.75" (50.16 cm)
WIDTH	49.6" (126 cm)
DEPTH	15" (38.1 cm)
WEIGHT	48 lb (21.77 kg)

GENERAL SAFETY

- Keep work area clean and dry.
- Use correct/recommended tools for the job.
- Never leave unattended tools plugged in or running.
- Never force a part into place.
- Wear appropriate safety apparel for the job you are doing.
- Wear safety glasses/goggles.
- Keep small parts away from children. Never leave a small child unattended while assembling.
- Always use common sense – your personal safety is your responsibility.


NEVER EXCEED THE FOLLOWING WEIGHT LIMITS FOR THIS BENCH

- Maximum load for bench seat: Up to 1,000 lb (454 kg) when weight is evenly distributed.
- Maximum load for shelf: Up to 1,500 lb (680 kg) when weight is evenly distributed.
- It is recommended that the heaviest load be placed on the bottom shelf.




- *Save all warnings and instructions for future reference.*
- *This manual contains important safety and assembly instructions. Read all instructions and follow them with the use of this product.*

No.	Description	Qty.	No.	Description	Qty.
1	Cushion Seat	1	7	Safety Strap With Weld Nut	4
2	Pre-Bolted Upright Assembly	2	8	Safety Strap Bolt	8
3	Wire Deck	1	9	Locking Shelf Pin	12
4	Crossbeam	4	10	4 mm Hex Key	1
5	Bench Top Support Strap (Black)	4	11	4 mm Hex Bit	1
6	Recessed Shelf Support Strap (Yellow)	3	12	Locking Grid Clip	4

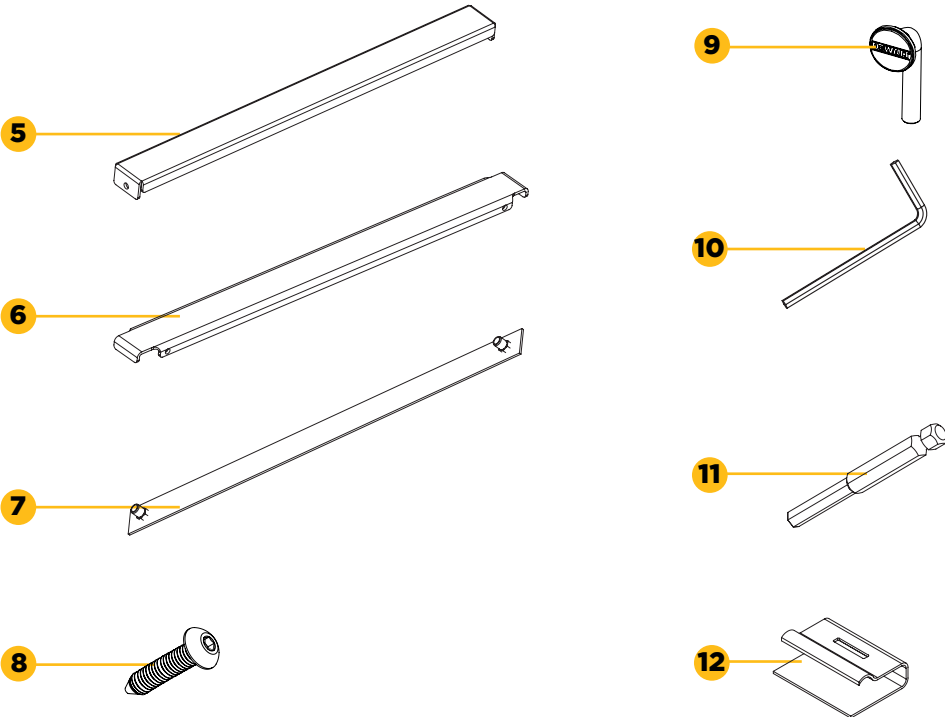**BEFORE YOU BEGIN:**

- Read all instructions thoroughly.
- Remove all components from the box, and lay them on the floor in an orderly fashion.
- Wear eye protection.
- Be cautious of sharp edges.
- Keep this information for further reference.



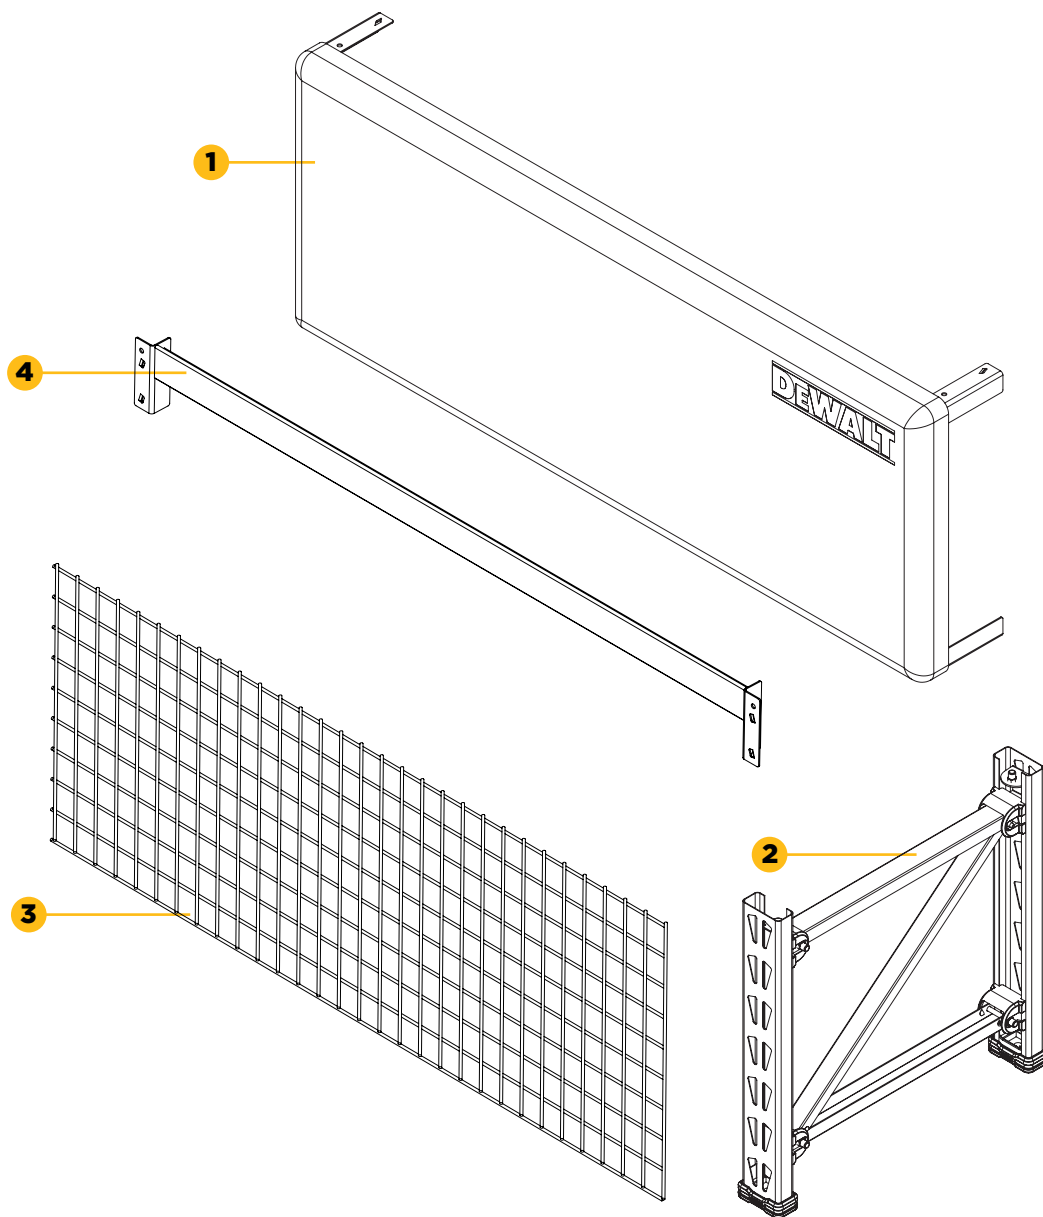

Tools Required for Bench Assembly: 4 mm Hex Key (included) OR 4 mm Hex Bit (included); Rubber Mallet (not included), Flat-Head Screwdriver (not included)

CROSSBEAM INSTRUCTIONS

- Note: It is recommended for one person to hold the pre-assembled upright frames in place while a second person installs the crossbeams.
- Note: Keep the bolt heads of the diagonal pieces of the uprights on the outside of the assembly (*see first image).
- Note: The top crossbeams have 4 slots for their associated bench support straps, and the bottom crossbeams have 3 slots for their associated support straps.

STEP 1

- There is a set of locking tabs at both ends of every crossbeam. To begin assembly, take a crossbeam with 3 slots and insert the tabs into two of the holes on the lower portion of one upright frame. Engage the locking tabs into the holes using a downward motion. The locking bolt hole should be at the top. Make sure the end of the crossbeam is flush against the upright frame.

STEP 2




- Repeat for the opposite side of the upright frame. Tap the ends of the crossbeam closest to the upright frames with a rubber mallet until fully seated. The crossbeam and locking tabs should easily slip into place. If they do not, then recheck the alignment of the teardrop-shaped holes and tabs. Too much force may damage the interlock between the crossbeam and upright frame.

STEP 3

- Using the methods listed above, install the other crossbeam with 3 slots to the opposite side of the upright frames, parallel to the first crossbeam you installed. Make sure both crossbeams are at the same level.

STEP 4

- Continue by installing the top sets of crossbeams flush to the top of the upright frames (each top crossbeam has 4 slots and one will have the DEWALT® badge on the far right). Make sure the crossbeams are attached at the same level on both sides.




SAFETY STRAP AND SUPPORT STRAP INSTRUCTIONS

- Note: There are two (2) safety straps with weld nuts and three (3) recessed shelf support straps on the bottom set of crossbeams.
- Note: There are two (2) safety straps with weld nuts and four (4) bench top support straps on the top set of crossbeams.
- Note: Top and bottom crossbeams use different support straps.


STEP 1

- Starting with the bottom set of crossbeams, place a safety strap with weld nut between the lower ridges of the crossbeams where two sets of holes have been pre-drilled. Thread a safety strap bolt up through the bottom of the pre-drilled holes and through the weld nuts, and fully tighten with the included hex key or drill bit. Repeat for the second strap on this set of crossbeams, and continue for the last 3 straps.





STEP 2

- On the bottom of the bench, place a recessed shelf support strap (yellow) perpendicular to the bottom crossbeams, and insert each end into the channel on each ridge of the crossbeam. Repeat for the remaining 2 (yellow) straps.



STEP 3

- On the top of the bench, place a bench top support strap (black) perpendicular to the top crossbeams, and insert each end into the channel on each ridge of the crossbeam. Repeat for the remaining 3 (black) straps.



WIRE GRID AND LOCKING SHELF PIN INSTRUCTIONS

- Note: The wire grid consists of two sides – a “short” side and “long” side. If you plan on sliding objects on and off of the shelf from the front of the bench, then we recommend having the “short” side of the grid facing upward. If you plan on sliding objects from the side of the bench, then we recommend having the “long” side facing upward.

STEP 1

- Place the wire grid onto the top ridge of the lower set of crossbeams. If seated properly, the grids will “pop” into place and lay evenly.

STEP 2

- Place a locking grid clip at the outermost corner of the shelf. Make sure the rolled edge with the groove is facing upwards.

STEP 3

- With one hand, apply pressure to the back of the clip. With your free hand, insert a flat-head screwdriver (not included) into the small slot in the clip to spread the tine up and over the wire that is underneath.

STEP 4




- Pull back on the screwdriver. The grooved channel in the clip should now match up with the wire decking, which will help secure it to the shelf beam.

STEP 5

- Repeat Steps 2-4 for the remaining three corners of the wire grid.

STEP 6

- There is a locking pin hole at both ends of every crossbeam. This is where the locking shelf pins are to be installed. If a pin does not easily slip into place, then moderately tap the end of the crossbeam to fully seat the locking tabs.



CUSHION SEAT INSTRUCTIONS




- Note: Place onto the frame as evenly as possible to ensure the cushion seats properly.

STEP 1

- Place cushion seat onto the assembled bench frame. The corner brackets of the cushion seat slide over the outer edges of the upright frame.

STEP 2

- There is a locking pin hole on each corner bracket of the cushion seat. This is where the locking shelf pins are to be installed. If a pin does not easily slip into place, sit on the corner of the bench to fully seat the locking tabs.



- **Do not stand on this product. You may fall which may cause personal injury.**

TWO YEAR LIMITED WARRANTY: DEWALT® will replace this garage bench due to faulty materials or workmanship for two years from the date of purchase (be sure to keep your receipt). This warranty does not cover part failure due to normal wear or bench abuse. This warranty does not apply to accessories or damage caused where repairs have been made or attempted. For further detail of warranty coverage, call 1-844-377-8451.

In addition to the warranty, DEWALT® garage benches are covered by our:

90 DAY MONEY BACK GUARANTEE: If you are not completely satisfied with the performance of your DEWALT® Garage Bench for any reason, you can return it within 90 days from the date of purchase with a receipt for a full refund – no questions asked.

LATIN AMERICA: This warranty does not apply to products sold in Latin America. For products sold in Latin America, see country specific warranty information contained in the packaging, call the local company or see website for warranty information.

Copyright © 2018 DEWALT.

DEWALT® and the DEWALT Logo are trademarks of the DEWALT Industrial Tool Co., or an affiliate thereof and are used under license. The yellow/black color scheme is a trademark for DEWALT power tools & accessories. Product may differ from that pictured. Does not affect function.

JS PRODUCTS • 6445 MONTESSOURI STREET, LAS VEGAS, NV 89113

