

SPECIFICATIONS

Lawn Edger Specifications

Model	201465
Edging Depth	0 – 2.5 in. (0 – 63 mm)
Blade Diameter	9 in. (228 mm), 3 Point
Blade Center Hole Diameter	0.5 in. (12.9 mm)
Wheel Diameter	7 in. (177.8 mm)

Overall Dimensions

Weight	55 lbs. (25kg)
Length	42.1 in. (107 cm)
Width	18.9 in. (48 cm)
Height	40.4 in. (102.5 cm)

Engine Specifications

Model	R80-VP
Displacement	79cc
Type	4-Stroke OHV

Spark Plug

OEM Type	A5RTC
Replacement Type	NGK CR5HSA or equivalent
Gap	0.023 - 0.031 in. (0.6 - 0.8 mm)

Valve

Intake Clearance	0.00197 - 0.0059 in. (0.05 - 0.15 mm)
Exhaust Clearance	0.00197 - 0.0059 in. (0.05 - 0.15 mm)

NOTICE

A technical bulletin regarding valve adjustment procedures is available at www.championpowerequipment.com.

Oil Specifications


NOTICE

Temperature will affect engine oil and engine performance. Change the type of engine oil used based on temperature shown in the “*Recommended Engine Oil Type*” table.

DO NOT OVERFILL.

Type *See following chart

Capacity 11.8 fl. oz. (350 ml)

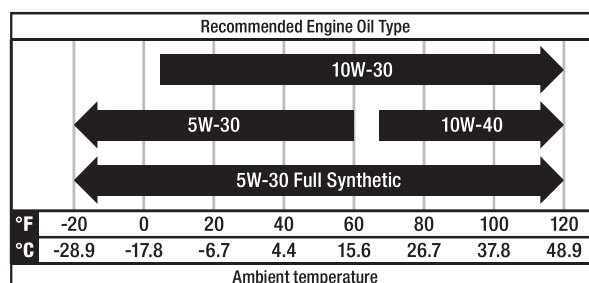

Fuel Specifications

Use unleaded gasoline with a minimum octane rating of 87 and an ethanol content of 10% or less by volume. DO NOT USE E15 or E85. DO NOT OVERFILL.

Gasoline Capacity 0.37 gal. (1.4 L)

Temperature Specifications

Starting Temperature Range (°F/°C) 5 to 104/-15 to 40

NOTICE

An important message about temperature: Your product is designed and rated for continuous operation at ambient temperatures up to 104°F (40°C). When needed, it may be operated at temperatures ranging from 5°F (-15°C) to 122°F (50°C) for short periods of time. If exposed to temperatures outside this range during storage, it should be brought back within this range before operation. In any event, the product must always be operated outdoors, in a well-ventilated area and away from doors, windows and vents.