



GB[®]
Gardner
Bender


**CABLE TIE
CATALOG**

CABLE TIES

Gardner Bender™ offers a broad range of cable ties in a wide variety of materials, colors, styles and size options to meet your specific needs. A patented design and high quality construction make Gardner Bender™ ties a great solution for bundling wire, cable, hoses, ducts and countless other applications.

Standard	4	Specialty	
Heavy Duty	5	- Eco	9
All Weather	6	- Beaded	9
Assorted Packs	6	- Hook and Loop Fasteners	10
Specialty	7-10	Releasable	10
- Self Cutting	7	Tools & Accessories	10-11
- Mounting	7	- Cable Tie Tensioning Tools	10
- Metal Pawl	8	- Mounting Bases & Push Mounts	11
- Stainless Steel	8	- Bundling Tool & Accessories	11
- Flex Strap	8		
- ID	9		




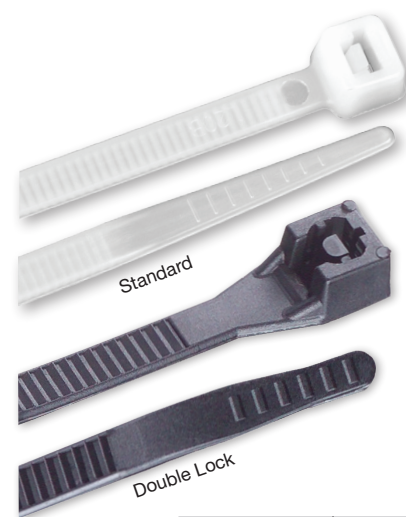

STANDARD CABLE TIES

Gardner Bender offers a broad range of cable ties, great for bundling wire, cable, hoses, ducts and countless other applications.

- Made from durable nylon 6/6 material.
- Black Ties are UV Resistant.
- UL Type 21 Cable Ties serviceable through temperatures -40° to 185°F (-40° to 85°C).
- Meets UL 94 V-2 flammability classification.
- Patented DoubleLock® design has teeth on both sides of the tie, ensuring 50% greater strength than industry standards.




Part #	Length "A"	Tensile Strength	Pack Qty.	Double Lock®	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)	UL Type
45-104UVB	4"	18 lb	30/bag		Black	.10"	.035"	.81"	21
45-104	4"	18 lb	40/bag		Natural	.10"	.035"	.81"	21
46-104	4"	18 lb	100/bag		Natural	.10"	.035"	.81"	21
46-104UVB	4"	18 lb	100/bag		Black	.10"	.035"	.81"	21
46-104MN	4"	18 lb	1000/bag		Natural	.10"	.035"	.81"	21
46-104UVBMN	4"	18 lb	1000/bag		Black	.10"	.035"	.81"	21
46-206	6"	30 lb	100/bag		Natural	.13"	.045"	1.38"	21
46-206M	6"	30 lb	1000/bag		Natural	.13"	.045"	1.38"	21
46-206UVB	6"	30 lb	100/bag		Black	.13"	.045"	1.38"	21
43-308UVB	8"	45 lb	100/bag	✓	Black	.14"	.055"	2.0"	21
46-008UVB	8"	50 lb	1000/bag		Black	.17"	.055"	2.0"	21
46-108N	8"	50 lb	100/bag		Natural	.17"	.055"	2.0"	21
45-308FY	8"	75 lb	20/bag	✓	Florescent Yellow	.17"	.055"	2.0"	21
45-308G	8"	75 lb	20/bag	✓	Green	.17"	.055"	2.0"	21
45-308	8"	75 lb	20/bag	✓	Natural	.17"	.055"	2.0"	21
45-308FB	8"	75 lb	20/bag	✓	Fluorescent Blue	.17"	.055"	2.0"	21
45-308FG	8"	75 lb	20/bag	✓	Fluorescent Green	.17"	.055"	2.0"	21
45-308UVB	8"	75 lb	15/bag	✓	Black	.17"	.055"	2.0"	21
46-308	8"	75 lb	100/bag	✓	Natural	.17"	.055"	2.0"	21
46-308G	8"	75 lb	100/bag	✓	Green	.17"	.055"	2.0"	21
46-308MN	8"	75 lb	1000/bag	✓	Natural	.17"	.055"	2.0"	21
46-308UVB	8"	75 lb	100/bag	✓	Black	.17"	.055"	2.0"	21
46-308UVBMN	8"	75 lb	1000/bag	✓	Black	.17"	.055"	2.0"	21
46-210	11"	45 lb	100/bag	✓	Natural	.13"	.055"	3.0"	21
46-210UVB	11"	45 lb	100/bag	✓	Black	.13"	.055"	3.0"	21
46-111	11"	50 lb	100/bag		Natural	.18"	.055"	3.0"	21
45-312	11"	75 lb	12/bag	✓	Natural	.17"	.055"	3.0"	21
45-312UVB	11"	75 lb	8/bag	✓	Black	.17"	.055"	3.0"	21
46-310	11"	75 lb	100/bag	✓	Natural	.17"	.055"	3.0"	21
46-310M	11"	75 lb	1000/bag	✓	Natural	.17"	.055"	3.0"	21
46-310UVB	11"	75 lb	100/bag	✓	Black	.17"	.055"	3.0"	21
46-310UVBM	11"	75 lb	1000/bag	✓	Black	.17"	.055"	3.0"	21
46-311	11"	75 lb	300/bag	✓	Natural	.17"	.055"	3.0"	21
46-507N	11"	75 lb	500/bag	✓	Natural	.17"	.055"	3.0"	21
42-314	14"	45 lb	8/bag	✓	Natural	.14"	.055"	4.0"	21
42-314UVB	14"	45 lb	8/bag	✓	Black	.14"	.055"	4.0"	21
46-214	14"	45 lb	100/bag	✓	Natural	.14"	.055"	4.0"	21
46-214UVB	14"	45 lb	100/bag	✓	Black	.14"	.055"	4.0"	21
46-114	14"	50 lb	100/bag		Natural	.17"	.055"	4.0"	21
46-114UVB	14"	50 lb	100/bag		Black	.17"	.055"	4.0"	21
46-514	14"	50 lb	500/bag	✓	Natural	.17"	.055"	4.0"	21
46-514UVB	14"	50 lb	500/bag	✓	Black	.17"	.055"	4.0"	21
45-315	14"	75 lb	8/bag	✓	Natural	.17"	.055"	4.0"	21
45-315UVB	14"	75 lb	8/bag	✓	Black	.17"	.055"	4.0"	21
46-315	14"	75 lb	100/bag	✓	Natural	.17"	.055"	4.0"	21
46-315M	14"	75 lb	1000/bag	✓	Natural	.17"	.055"	4.0"	21
46-315UVB	14"	75 lb	100/bag	✓	Black	.17"	.055"	4.0"	21
46-315UVBM	14"	75 lb	1000/bag	✓	Black	.17"	.055"	4.0"	21




HEAVY DUTY CABLE TIES

Heavy-duty design offers 120 and 180 lbs of tensile strength.

- Black Ties are UV Resistant.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C). Installation temperature 14°F (-10°C).



Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)	UL Type
46-408	8"	120 lb	100/bag	Natural	.25"	.070"	2.0"	21
46-408UVB	8"	120 lb	100/bag	Black	.25"	.070"	2.0"	21
46-412	12"	120 lb	100/bag	Natural	.25"	.070"	3.2"	21
46-412UVB	12"	120 lb	100/bag	Black	.25"	.070"	3.2"	21
45-515	15"	120 lb	10/bag	Natural	.25"	.070"	4.2"	21
45-515UVB	15"	120 lb	10/bag	Black	.25"	.070"	4.2"	21
46-415	15"	120 lb	50/bag	Natural	.25"	.070"	4.2"	21
46-415UVB	15"	120 lb	50/bag	Black	.25"	.070"	4.2"	21
45-518N	18"	180 lb	10/bag	Natural	.35"	.070"	5.1"	21
45-518UVBN	18"	180 lb	10/bag	Black	.35"	.070"	5.1"	21
46-418	18"	180 lb	50/bag	Natural	.35"	.070"	5.1"	21
46-418UVB	18"	180 lb	50/bag	Black	.35"	.070"	5.1"	21
45-521	21"	180 lb	10/bag	Natural	.35"	.070"	6.4"	21
45-521UVB	21"	180 lb	10/bag	Black	.35"	.070"	6.4"	21
46-421	21"	180 lb	50/bag	Natural	.35"	.070"	6.4"	21
46-421UVB	21"	180 lb	50/bag	Black	.35"	.070"	6.4"	21
45-524	24"	180 lb	10/bag	Natural	.35"	.070"	7.1"	21
45-524SP	24"	180 lb	10/bag	Natural	.35"	.070"	7.1"	21
45-524UVB	24"	180 lb	10/bag	Black	.35"	.070"	7.1"	21
45-524UVBSP	24"	180 lb	10/bag	Black	.35"	.070"	7.1"	21
46-424	24"	180 lb	50/bag	Natural	.35"	.070"	7.1"	21
46-424UVB	24"	180 lb	50/bag	Black	.35"	.070"	7.1"	21
46-330	30"	180 lb	25/bag	Natural	.35"	.070"	9.0"	21
46-330UVB	30"	180 lb	25/bag	Black	.35"	.070"	9.0"	21
45-536	36"	180 lb	10/bag	Natural	.35"	.070"	11.0"	21
45-536SP	36"	180 lb	10/bag	Natural	.35"	.070"	11.0"	21
45-536UVB	36"	180 lb	10/bag	Black	.35"	.070"	11.0"	21
45-536UVBSP	36"	180 lb	10/bag	Black	.35"	.070"	11.0"	21
46-436	36"	180 lb	50/bag	Natural	.35"	.070"	11.0"	21
46-436UVB	36"	180 lb	50/bag	Black	.35"	.070"	11.0"	21
45-548	48"	180 lb	10/bag	Natural	.35"	.070"	14.8"	21
45-548SP	48"	180 lb	10/bag	Natural	.35"	.070"	14.8"	21
45-548UVB	48"	180 lb	10/bag	Black	.35"	.070"	14.8"	21
45-548UVBSP	48"	180 lb	10/bag	Black	.35"	.070"	14.8"	21
46-448	48"	180 lb	50/bag	Natural	.35"	.070"	14.8"	21
46-448UVB	48"	180 lb	50/bag	Black	.35"	.070"	14.8"	21

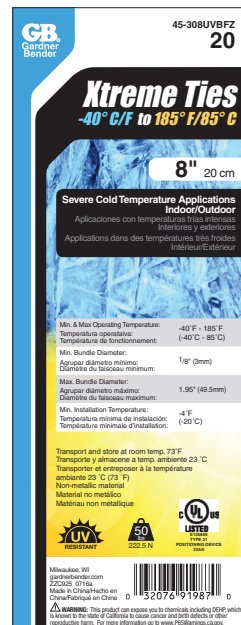

ALL WEATHER CABLE TIES

All Weather Xtreme Ties save the day in harsh environment applications. Specifically designed to perform under intense UV, low humidity and cold weather conditions.

- Engineered from special modified Nylon 6/6 - ISO certified to maintain its properties in all weather conditions.

- Black ties are UV Resistant.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C). Install temperature -4°F (-20°C)
- Designed to handle the driest weather conditions while competitors become brittle and break.




Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)	UL Type
45-308UVBFZ	8"	50 lb	20/bag	Black	.17"	.055"	2"	21
46-308UVBFZ	8"	50 lb	100/bag	Black	.17"	.055"	2"	21
45-311UVBFZ	11"	50 lb	20/bag	Black	.17"	.055"	3"	21
46-311UVBFZ	11"	50 lb	100/bag	Black	.17"	.055"	3"	21
45-314UVBFZ	14"	50 lb	20/bag	Black	.17"	.055"	4"	21
46-314UVBFZ	14"	50 lb	100/bag	Black	.17"	.055"	4"	21

ASSORTED PACKS CABLE TIES

Secures bundles to walls, studs or other surfaces easily.

- Black Ties are UV Resistant.
- Various lengths and tensile strengths to meet the requirements for most any job.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C).




Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)	UL Type
10096	4", 8"	18 lb, 45 lb	200/tube	Tan, Olive, Black	.10", .14"	.035", .055"	.81", 2.0"	21
50398	4", 6", 8"	18 lb, 45 lb	500/canister	Black, Natural, Green, Red, Yellow	.10", .14"	.035", .055", .055"	.81", 1.38", 2.0"	21
50098N	4", 6", 11"	18 lb, 45 lb	500/canister	Natural	.10", .14"	.035", .055", .055"	.81", 1.38", 3.0"	21
65001	4", 8", 11"	18 lb, 45 lb	650/canister	Black, Natural, Green, Red, Yellow	.10", .17"	.035", .055", .055"	.81", 2.0", 3.0"	21
10090WA	4", 8"	18 lb, 45 lb	200/tube	Green	.10", .14"	.035", .055"	.81", 2.0"	21
10095VDV	4", 8"	18 lb, 75 lb	200/bag	Blue, Green, Yellow	.10", .18"	.035", .055"	.81", 2.0"	21
10097UVL	4", 8"	18 lb, 45 lb	200/tube	Black	.10", .14"	.035", .055"	.81", 2.0"	21
10098NL	4", 8"	18 lb, 45 lb	200/tube	Natural	.10", .14"	.035", .055"	.81", 2.0"	21
46-ACT	4", 8", 11"	18 lb, 75 lb	100/bag	Natural	.10", .17"	.035", .055", .055"	.81", 2.0", 3.0"	21
45-308FST	8"	75 lb	20/bag	Fluorescent Pink, Fluorescent Orange, Fluorescent Blue, Fluorescent Yellow, Fluorescent Green	.17"	.055"	2.0"	21
46-308FST	8"	75 lb	100/bag	Fluorescent Pink, Fluorescent Orange, Fluorescent Blue, Fluorescent Yellow, Fluorescent Green	.17"	.055"	2.0"	21
46-ACL	8"	75 lb	120/bag	Blue, Fluorescent Orange, Fluorescent Green, Red, Yellow	.18"	.055"	2.0"	21

SPECIALTY CABLE TIES



SELF CUTTING CABLE TIES

- No tools required! Simply twist and tear.
- Durable stainless steel blade for a clean cut everytime.
- Patented design.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C).
- Multi-purpose use.




Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)
45-308SC	8"	50 lb	20/bag	Natural	.17"	.055"	2"
45-308UVBSC	8"	50 lb	20/bag	Black	.17"	.055"	2"
46-308SC	8"	50 lb	50/bag	Natural	.17"	.055"	2"
46-308UVBSC	8"	50 lb	50/bag	Black	.17"	.055"	2"
45-311SC	11"	50 lb	20/bag	Natural	.17"	.055"	3"
45-311UVBSC	11"	50 lb	20/bag	Black	.17"	.055"	3"
46-311SC	11"	50 lb	50/bag	Natural	.17"	.055"	3"
46-311UVBSC	11"	50 lb	50/bag	Black	.17"	.055"	3"
45-314SC	14"	50 lb	20/bag	Natural	.17"	.055"	4"
45-314UVBSC	14"	50 lb	20/bag	Black	.17"	.055"	4"
46-314SC	14"	50 lb	50/bag	Natural	.17"	.055"	4"
46-314UVBSC	14"	50 lb	50/bag	Black	.17"	.055"	4"

MOUNTING CABLE TIES

Secures bundles to walls, studs or other surfaces easily.

- Accepts #10/5mm screws.
- Black ties are UV Resistant.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C).



Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness	Bundle Diameter Max (Inches)	UL Type	Mounting Style
45-308MT	8"	50 lb	20/bag	Natural	.17"	.05"	2"	21	Screw Mount
45-308MTG	8"	50 lb	15/bag	Grey	.17"	.05"	2"	21	Screw Mount
45-308MTUVB	8"	50 lb	15/bag	Black	.17"	.05"	2"	21	Screw Mount
48-308	8"	50 lb	100/bag	Natural	.17"	.05"	2"	21	Screw Mount
48-308UVB	8"	50 lb	100/bag	Black	.17"	.05"	2"	21	Screw Mount
46-111UVBM	11"	50 lb	100/bag	Black	.17"	.05"	3"	21	Screw Mount
48-114M	14"	120 lb	100/bag	Natural	.29"	.08"	4"	21	Screw Mount
48-214	14"	50 lb	100/bag	Natural	.17"	.05"	4"	21	Screw Mount
45-308PM	8"	50 lb	25/bag	Natural	.17"	.05"	2"		Push Mount
45-308PMUVB	8"	50 lb	25/bag	Black	.17"	.05"	2"		Push Mount



METAL PAWL CABLE TIES




- Metal Pawl ensures a firm and lasting closure.
- Stainless steel pawl design for infinite locking points on the body of the tie.
- Black ties are UV Resistant.
- Made from durable Nylon 6/6.
- Smooth notchless outside reduces stress under tension.

Part #	Length	Tensile Strength	Pack Qty.	Color	Width (Inches)	Thickness	Bundle Diameter Max (Inches)
46-308MP	7"	50 lb	20/bag	Natural	.17"	.055"	2"
46-308UVBMP	7"	50 lb	20/bag	Black	.17"	.055"	2"
46-310MP	11"	50 lb	10/bag	Natural	.19"	.055"	3"
46-310UVBMP	11"	50 lb	10/bag	Black	.19"	.055"	3"



ID CABLE TIES


- ID tab allows for easy wire/cable identification.
- For multi-purpose use.
- Min/Max operating temperature -40° to 185°F (-40° to 85°C).




Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)
45-308ID	8"	50 lb	25/bag	Natural	.17"	.055"	2"

ECO CABLE TIES

- Made from 100% Recycled Nylon.
- Recycled Nylon UL validated.
- Min/Max operating temperature 32° to 185°F (0° to 85°C).



Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)
41-308R	8"	50 lbs	15/bag	Green	.16	.055	2"
42-308R	8"	50 lbs	75/bag	Green	.16	.055	2"
42-308UVBR	8"	50 lbs	75/bag	Green	.16	.055	2"
41-311R	11"	50 lbs	15/bag	Green	.16	.055	3"
42-311R	11"	50 lbs	75/bag	Green	.16	.055	3"

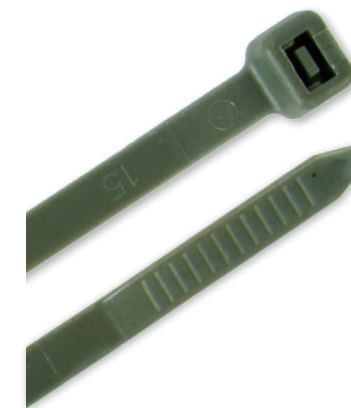

STAINLESS STEEL CABLE TIES



- 304 Stainless Steel design for harsh, corrosive, and salt-water environments.
- Resists chemicals and radiation exposure as well as enduring extreme temperatures.
- Stainless steel is great for clean environments such as food processing areas.
- Self-locking ball mechanism meets low insertion force requirements while maintaining high tensile strength.
- Operating temperature rated up to 572°F (300°C)

Part #	Length	Tensile Strength	Pack Qty.	Color	Width (Inches)	Thickness	Bundle Diameter Max (Inches)
45-306SS	6"	100 lb	10/bag	Stainless Steel	.18"	.010"	1.5"
45-312SS	11"	100 lb	10/bag	Stainless Steel	.18"	.010"	3.75"

BEADED CABLE TIES

Finally, a re-usable cable tie that offers the heavy duty tensile strength you need. Easier than a twist tie, more versatile than a cable tie, and stronger than hook and loop fasteners.

- Adjustable: Bundle capacities from 1/4" to 7" diameters or string together for greater capacity.
- Secure: Bundle and secure with double lock through 2 convenient keyhole slots to bind, hook, and secure.
- Flexible: Bundle and create a loop to hang.
- Black ties are UV Resistant.

Part #	Length	Tensile Strength	Pack Qty.	Color
45-8BEADBK	8"	70 lb	15/bag	Black
45-8BEADGN	8"	70 lb	15/bag	Green
46-8BEADBK	8"	70 lb	40/bag	Black
45-12BEADBK	12"	70 lb	15/bag	Black
45-12BEADGN	12"	70 lb	15/bag	Green
46-12BEADBK	12"	70 lb	40/bag	Black
45-18BEADBK	18"	140 lb	10/bag	Black
45-18BEADGN	18"	140 lb	10/bag	Green
46-18BEADBK	18"	140 lb	25/bag	Black
45-24BEADBK	24"	140 lb	5/bag	Black
46-24BEADBK	24"	140 lb	20/bag	Black



FLEX STRAP CABLE TIES



- Cable Wraptor® Flexible Straps offer a reusable, versatile, lightweight organizational solution without a wasted "tail". Just wrap, tighten, then cut and wrap again! Stretchable, flexible material won't damage delicate cables and cords.
- Re-usable. Thread the tail backward through the last slot used, and pull to release the strap.
 - 12" long strap with finger grips on the end and tail.
 - Stretchy material will stretch up to 300%.
 - Thread 2 slots for a stronger hold on bundle.
 - Interlinking - thread multiple straps together for greater lengths.

Part #	Length	Tensile Strength	Pack Qty.	Color	Width (Inches)	Thickness	Bundle Diameter Max (Inches)
45-812GN	12"	20-50 lb	12/bag	Green	.4"	.06"	3.25"
45-812N	12"	20-50 lb	12/bag	Natural	.4"	.06"	3.25"
45-812UVB	12"	20-50 lb	12/bag	Black	.4"	.06"	3.25"
45-824N	12"	20-50 lb	24/bag	Natural	.4"	.06"	3.25"
45-824UVB	12"	20-50 lb	24/bag	Black	.4"	.06"	3.25"

*50 lb strength when looped twice, otherwise 20 lb when looped once.



HOOK & LOOP CABLE TIES



- Reusable strip fastens wires and cables.
- Wrap excess around bundle – no waste.
- Great for home/office, tools and electronics.
- Cinch tab allows attachment to cable or cord.





Part #	Length	Tensile Strength	Pack Qty.	Color	Width (Inches)	Thickness	Bundle Diameter Max (Inches)
45-V8BKV	8"	N/A	5/bag	Black	.5"	.05"	2.25"
45-V8BKW	8"	N/A	5/bag	Black	.5"	.05"	2.25"
45-V15FBK	8"	N/A	50/bag	Black	.5"	.05"	2.25"
45-V11BKW	11"	N/A	5/bag	Black	.5"	.05"	3"

RELEASABLE CABLE TIES



- Extended releasable tab in the head makes for easy release and reusability.
- Great for temporary work or where frequent servicing is required.
- Black ties are UV Resistant.
- Min/Max operating temperature -40° to 185°F (40° to 85°C).

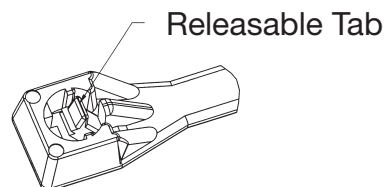

Part #	Length "A"	Tensile Strength	Pack Qty.	Color	Width (Inches) "B"	Thickness "C"	Bundle Diameter Max (Inches)
47-108	8"	50 lb	25/bag	Natural	.17"	.05"	1.75"
47-108UVB	8"	50 lb	25/bag	Black	.17"	.05"	1.75"
47-111	12"	50 lb	10/bag	Natural	.18"	.05"	3"
47-111UVB	12"	50 lb	10/bag	Black	.18"	.05"	3"
47-115UVB	15"	175 lb	4/bag	Black	.52"	.09"	4"
47-121UVB	21"	175 lb	3/bag	Black	.52"	.09"	6"
47-127UVB	28"	175 lb	3/bag	Black	.52"	.09"	8"

TOOLS & ACCESSORIES

CABLE TIE TENSIONING TOOLS




CTT-45

CTT-45

Tightens and cuts off cable ties.

- Quick twist snaps off excess length.
- Use for all cable ties up to 75 lbs tensile strength.
- Lightweight, economical.

MOUNTING BASES & PUSH MOUNTS

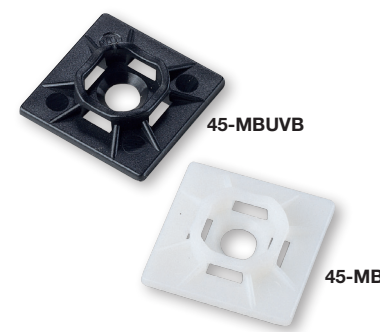

- Adhesive-backed mounting bases for securing wire and cable bundles.
- Center screw hole for extra holding power.
- Molded with durable nylon 6/6 material.
- Four-sided insertion design for mounting flexibility.



45-PMBUVB



45-PMB

Part #	Size	Pack Qty.	Color	Fits Widths Up To	Recommended Cable Tie Size
45-MB	1"x 1"	5/bag	Natural	.17"	18 lbs to 75 lbs
45-MBUVB	1"x 1"	5/bag	Black	.17"	18 lbs to 75 lbs
MB-20	1"x 1"	100/bag	Natural	.17"	18 lbs to 75 lbs
MB-20UVB	1"x 1"	100/bag	Black	.17"	18 lbs to 75 lbs
45-PMB	5/16" x 9/16"	10/clam	Natural	.21"	18 lbs to 75 lbs
45-PMBUVB	5/16" x 9/16"	10/clam	Black	.21"	18 lbs to 75 lbs

BUNDLING TOOL & ACCESSORIES



The Bundle Boss can handle bundle sizes up to 45" without all the wasted cable tie material. The Bundle Boss saves time and space-allowing you to use one tool instead of carrying multiple sizes of cable ties.

- Bundling data cables
- Electrical cords
- Hoses/Ropes
- Industrial applications
- Industrial applications
- BB-K01 includes 1 bundling tool, nearly 40ft of cable tie, and 100 clips.
- Cable Tie cartridge holds 39ft of material.

Part #	Length	Tensile Strength	Pack Qty.	Color	Width (Inches)	Thickness	Product Item
BB-K01	N/A	N/A	1/box	Black	.18"	.055"	Bundling Tool
BB-B01	39.4'	50 lb	1/clam	Natural	.18"	.055"	Cable Ties
BB-B01UVB	39.4'	50 lb	1/clam	Black	.18"	.055"	Cable Ties
BB-C01	N/A	N/A	100 clips	Natural	.32"	.27"	Clips
BB-C01UVB	N/A	N/A	100 clips	Black	.32"	.27"	Clips

