

Weston Stone™ Fire Pit Kit with Insert

See back for assembly instructions

 **Anchor Block MN**
an Oldcastle® company

Rules for Safe Operation: *Read and understand before assembly and use of fire pit*


- Always use in accordance with all applicable local and state fire codes
- Failure to follow these instructions could result in a hazardous fire causing property damage or physical injury
- Caution: For outdoor use only
- Use the fire ring on stone, dirt or sand surfaces
- For adult use only – do not allow children to use the fire ring
- Do not use on lawns, wooden decks, concrete or asphalt
- Do not use fire ring indoors or under a patio roof
- Do not use in windy conditions
- Do not leave fire unattended at any time
- Do not use under tree branches, trellis, or overhangs of any kind, including covered porches
- Do not use flammable liquids such as gasoline, alcohol, diesel fuel, kerosene, or charcoal lighter fluid to light or relight fires as this may also cause paint to flake off fire ring
- Care should be taken to make sure all combustible material is far enough away from the fire ring not to ignite it
- Avoid using softwoods such as pine or cedar because they are likely to throw sparks – hardwoods are recommended
- Keep children and pets away from the fire ring while it is in use
- Exercise the same precautions you would with any open fire
- Do not wear flammable or loose clothing when tending an open fire
- Avoid touching surfaces as they will be extremely hot
- Assure the fire is completely extinguished before leaving fire ring
- Any modifications to this appliance may be dangerous and are not permitted

Materials Needed:


- | | |
|------------------------------|---------------------|
| • Tape Measure | • Paver Base |
| • Marking Paint (for yards) | • Tamper |
| • Chalk (for marking patios) | • Rubber Mallet |
| • Shovel | • Concrete Adhesive |
| • Garden Rake | • Caulking Gun |
| • Level | • Lava Rock |

Weston Stone™ Fire Pit Kit with Insert Assembly Instructions


Always use in accordance with all applicable local and state fire codes

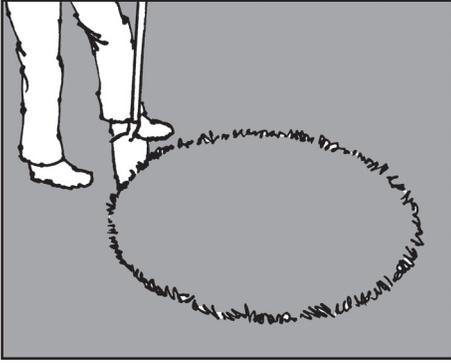


1. If putting your fire pit on a lawn, mark a 53-inch diameter circle and remove all sod and roots inside the circle. Dig approximately 2 inches deep. If putting your fire pit on a patio, mark the circle with chalk and skip ahead to step 4.

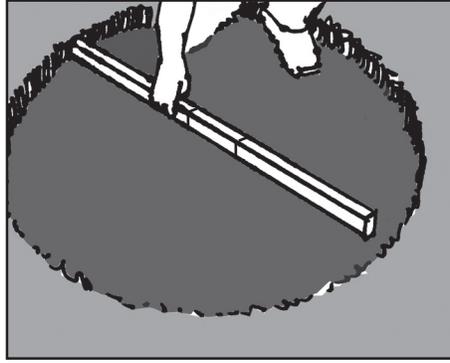


2. Check the level of the soil inside the circle in all directions. Remove soil from the high spots to bring it close to level.

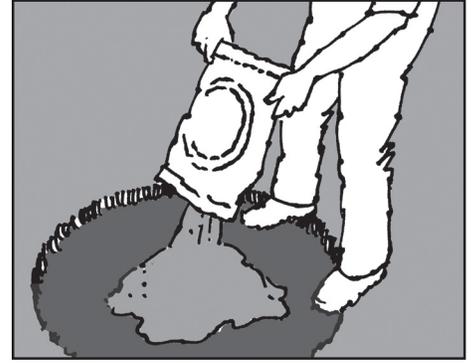


3. Add 1.5-2 inches of paver base to your circle and rake it level. Using a tamper, pack the entire area of paver base until firm. Make sure the surface is level before laying blocks.

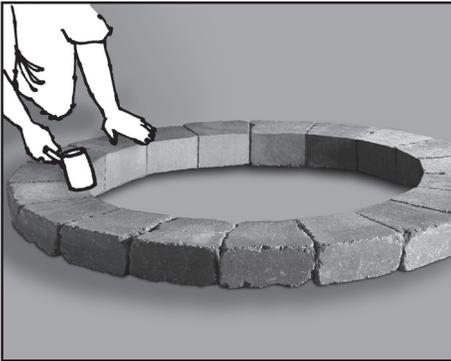


4. Place 19 wall block units on top of paver base. Lay them tightly together to form the circle. Level each stone front-to-back and side-to-side. Make sure each stone is even with the previously leveled block. Use a rubber mallet to level.

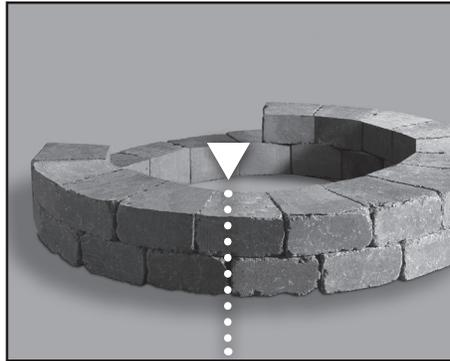

5. After the 1st course is set and leveled, start the 2nd course by placing the center of the top block in alignment with the joint between the blocks below. Continue this all the way around the circle.

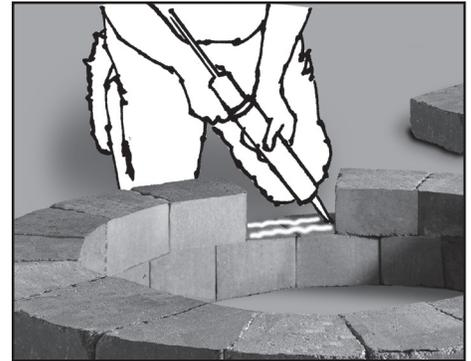

6. Once the 2nd course is all lined up, carefully remove one block at a time and apply two thick beads of concrete adhesive to the center of the blocks. Reinstall the block and push down firmly. Continue for all remaining blocks on 2nd course.

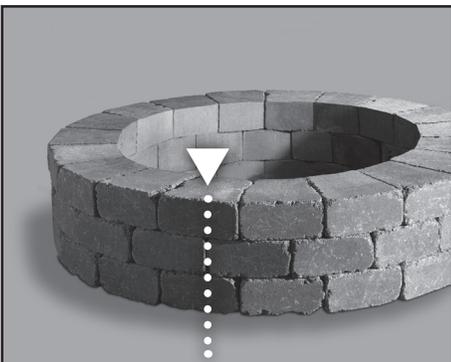

7. After the 2nd layer is finished, install the 3rd by placing the center of each block in line with the joint of the blocks below. When the 3rd course is all lined up, glue the blocks one-at-a-time as in step 6.



8. Next, lower the fire pit liner inside the blocks. The outside flange of the liner should be centered and rest on the inside edge of wall block units.



9. After the adhesive cure time has lapsed, pour lava rock into the fire pit until the level reaches the bottom of the fire ring liner.