



Meter Centers



Surface Mount Meter-Mains, 1-Phase, 3-Wire 120/240V AC

- UL listed
- Pad locking provisions on all devices
- Horn bypass and 5th jaw available as noted
- Side hinged door with one screw removal where shown
- Suitable for use only as service entrance equipment
- 22,000 AIC rated, or as noted
- RX type (or) HD type hub provision on top end wall as noted
- Contact local utility to confirm meter socket placement prior to installation
- See end of section for dimensions and wiring diagrams

MM0202B1200RJBX

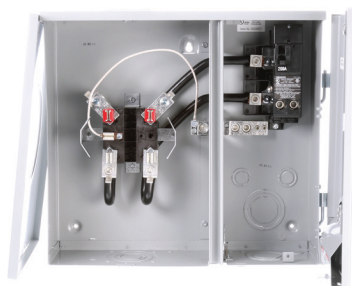

125, 150, and 200A meter main (factory installed), side hinge door.

MM0406L1200H



200A meter main (field added), side hinge door

MM0202B1200



125 and 200A meter mains, side hinge door

Catalog Number	Amp Rating (Cont.)	Utility Incoming	Bypass Type	No. of Spaces	No. of Circuits	Dimensions (inches)			Main Breaker	Short Circuit Rating	Hub Provision	5th Jaw	Cover Type
						H	W	D					

Meter-Main Breaker with Field Installed Breaker, Ring Style, 100-125amp

MM0202ML1100S ^①	100	OH	None	2	2	18.0	7.4	4.0	QP type	10,000	RX	—	Ring
MM0202ML1125H ^②	125	OH/UG				17.0	16.0	5.0	QP(H) type	22,000	2-RX	EC5J	Ring

Meter-Main Breaker with Factory Installed Breaker, 125-200amp (Side-by-Side construction)

MM0202B1150	150	OH/UG	None	2	2	17.0	16.0	5.0	QN2150H	22,000	RX	EMC5J	Ring
MM0202B1150R													Ringless
MM0202B1200	200	OH/UG	None	2	2	17.0	16.0	5.0	QN2200H	22,000	RX	EMC5J	Ring
MM0202B1200R													Ringless
MM0202B1125RJB	125	OH/UG	Horn Bypass	2	2	17.0	16.0	5.0	Q2125H	22,000	RX	Installed	Ringless
MM0202B1150RJB	150								QN2150H				Ringless
MM0202B1200RJB	200								QN2200H				Ringless
MM0202B1125RJBX	125						18.5	5.2	Q2125H				Ringless
MM0202B1150RJBX	150								QN2150H				Ringless
MM0202B1200RJBX	200								QN2200H				Ringless

Meter-Main Breaker with Field Installed Main & Subfeed Breaker up to 200amp (Side-by-Side construction)

Notes: Main Breaker with Fuses Installed; Main & Subbus Breaker up to 2000A (Old & New Construction);													
MM0406L1200GA	200	OH/UG	None	4	6	20.0	21.2	5.0	Main Lug	22,000	RX Cl. Plate	EMC5J	Ring
MM0406L1200H						19.8	17.2	5.0	1-QN or 2-QP type		2-RX		Ringless
MM0406L1200RH							21.8	5.0					Ringless
MM0406L1200RGA			Horn Bypass				17.2	5.0				Installed	Ringless
MM0406L1200RHJB ^③													

^① Over/Under

^② Side-by-Side

^③ Georgia Power approved