




4-IN-1 PNEUMATIC FLOORING NAILER

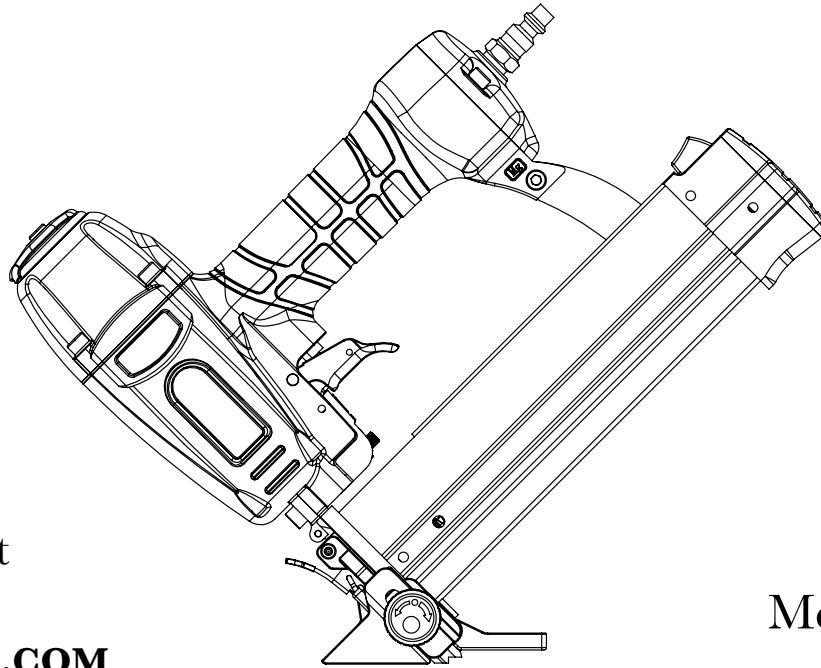

For replacement parts visit
WENPRODUCTS.COM

Model # 61741
bit.ly/wenvideo


IMPORTANT:

Your new tool has been engineered and manufactured to WEN's highest standards for dependability, ease of operation, and operator safety. When properly cared for, this product will supply you years of rugged, trouble-free performance. Pay close attention to the rules for safe operation, warnings, and cautions. If you use your tool properly and for intended purpose, you will enjoy years of safe, reliable service.



NEED HELP? CONTACT US!

Have product questions? Need technical support?
Please feel free to contact us at:

 **800-232-1195** (M-F 8AM-5PM CST)

 techsupport@wenproducts.com

 **WENPRODUCTS.COM**

TABLE OF CONTENTS

Technical Data	2
Safety Rules	4
Get to Know Your Air Nailer	7
Assembly	7
Operation	9
Maintenance	11
Troubleshooting	11
Exploded View and Parts List	12
Warranty	14

TECHNICAL DATA

Model Number:	WEN 61741
Minimum Operating Air Pressure:	60 PSI
Maximum Operating Air Pressure:	100 PSI
Nail Length Range:	3/4 to 2 in.
Staple Length Range:	5/8 to 1-9/16 in.
Nail Size:	18 Gauge
Nail Capacity:	100 nails/staples
Air Inlet:	1/4 in. NPT
Air Consumption:	1.7 CFM @ 80 PSI
Tool Weight:	3.4 lbs

GENERAL SAFETY RULES

Hello! The purpose of the following safety symbols is to attract your attention to possible dangers. We don't want any of our beloved WEN customers accidentally injuring themselves. The safety symbols and the explanations with them deserve your careful attention and understanding. The safety warnings do not by themselves eliminate any danger. These instructions and warnings are not substitutes for proper accident prevention measures.



Safety Alert Symbol: Indicates danger, warning, or caution. This may be used in conjunction with other symbols. Always follow the safety precautions to reduce the risk of fire, electric shock and personal injury.

WARNING - Do not attempt to operate this tool until you have thoroughly read and understood all instructions, safety rules, etc., contained in this manual. Failure to comply can result in accidents involving fire, electric shock, or serious personal injury. Save this operator's manual and review frequently for continuing safe operation and instructing others who may use this tool.

Safe operation of this power tool requires that you read and understand this operator's manual and all labels affixed to the tool. Safety is a combination of common sense, staying alert, and knowing how your tool works.

SAFETY RULES

Safety is a combination of common sense, staying alert and knowing how your item works. **SAVE THESE SAFETY INSTRUCTIONS.**

WARNING: To avoid mistakes and serious injury, do not use your tool until the following steps have been read and understood

1. **READ** and become familiar with this entire instruction manual, no matter how boring it may be. **LEARN** the tool's applications, limitations, and possible hazards.
2. **REGULATE AIR PRESSURE.** Use air pressure that is compatible with the ratings on the nameplate of the tool. Do not connect the tool to a compressor rated at over 175 psi even in the event of a regulator failure.
3. **USE ONLY** clean, dry and regulated air. Condensation from an air compressor can rust and damage the internal workings of the tool.
4. **ALWAYS** keep your work area clean, uncluttered, and well lit. **DO NOT** work on floor surfaces that are slippery with sawdust or wax.
5. **KEEP BYSTANDERS AT A SAFE DISTANCE** from the work area, especially when the tool is operating. **NEVER** allow children or pets near the tool.
6. **DO NOT FORCE THE TOOL** to do a job for which it was not designed.
7. **DRESS FOR SAFETY.** Do not wear loose clothing, gloves, neckties, or jewelry (rings, watches, etc.) when operating the tool. Inappropriate clothing and items can get caught in moving parts and draw you in. **ALWAYS** wear non-slip footwear and tie back long hair.
8. **WEAR A FACE MASK OR DUST MASK** to fight the debris produced by operation and ear protection to fight hearing loss. Everyone in the work area **MUST** wear safety glasses with side shields. These safety glasses must conform to ANSI Z87.1 requirements (approved glasses have "Z87" printed or stamped on them). It is the employer's responsibility to enforce the use of eye protection equipment by both the tool operator and others in the work area.



WARNING: Dust generated from certain materials can be hazardous to your health. Always operate the tool in a well-ventilated area and provide for proper dust removal. Use dust collection systems whenever possible.

9. **ALWAYS USE** an air hose that is rated at a maximum working pressure of at least 150 psi (10.3 bar) or 150% of the maximum system pressure.
10. **DO NOT USE BOTTLED GASES** to power this tool. Bottled compressed gases such as oxygen, carbon dioxide, nitrogen, hydrogen, propane, acetylene or air are not for use with pneumatic tools. Never use combustible gases or any other reactive gas as a power source for this tool. Danger of explosion and/or serious personal injury may result.
11. **USE COUPLINGS** that relieve all pressure from the tool when it is disconnected from the power supply. Use hose connectors that shut off the air supply from the compressor when the tool is disconnected.
12. **DISCONNECT** tool from air supply when not in use. Remove fasteners from magazine before leaving the area or passing the tool to another operator. Do not climb ladders, stairs, scaffoldings, etc. without disconnecting the tool. Do not carry a connected tool to another work area. Do not make adjustments, remove

SAFETY RULES

magazine, perform maintenance or clear jammed fasteners while connected to the air supply. If the contact trip is adjusted when the tool is connected to the air supply with loaded nails, accidental discharge may occur.

13. **LOAD FASTENERS** before connecting the tool to the air supply. Otherwise, fasteners are at risk of being fired during connection. The tool's driving mechanism may cycle when it is connected to the air supply. Do not load fasteners when the trigger or the safety is pressed down in order to prevent unintentional firings of a fastener.

14. **DO NOT REMOVE**, tamper with, or otherwise cause the tool, trigger or contact trip to become inoperable. Do not tape or tie the trigger or contact trip in the ON position. Do not remove springs from the contact trip. Make daily inspections for free movement of the trigger and contact trip. Uncontrolled discharge may result. Do not alter or modify the tool in any way.

15. **DO NOT OVERREACH**. Keep proper footing and balance at all times. Wear oil-resistant rubber-soled footwear. Keep the floor clear of oil, scrap, and other debris.

16. **MAINTAIN TOOLS PROPERLY**. ALWAYS keep tools clean and in good working order. Follow instructions for lubricating and changing accessories. Inspect tool before use. Do not operate if any portion of the tool, trigger, or contact trip is damaged, inoperable, disconnected, or altered. Leaking air, damaged parts, or missing parts should be repaired or replaced before use.

17. **ALWAYS ASSUME** that the tool contains fasteners. Do not point the tool at coworkers or yourself at any time, even if you think it will be really funny.

18. **MAKE THE WORKSHOP CHILDPROOF**. Use padlocks and master switches and ALWAYS remove starter keys. Keep bystanders, children and visitors away while operating the power tool. Distractions can cause you to lose control. When tool is not in use, it should be locked away in a safe place.

19. **DO NOT** operate the tool if you are under the influence of drugs, alcohol, or medication that may affect your ability to properly use the tool.

20. **REMOVE FINGER FROM TRIGGER** when not driving fasteners. Never carry the tool with your finger on the trigger.

21. **MAKE SURE HOSE** is free of obstructions or snags. Entangled or snarled hoses can cause a loss of balance.

22. **DO NOT DISCHARGE** fasteners into open air, concrete, stone, extremely hard woods, knots or any material too hard for the fastener to penetrate. Do not use the body of the tool or top cap as a hammer. Discharged fasteners may follow unexpected paths and cause bodily injury.

23. **DO NOT DRIVE FASTENERS** near the edge of your work material. The workpiece may split, causing the fastener to ricochet, injuring you or a co-worker. Be aware that the nail may follow the grain of the wood, causing it to protrude unexpectedly from the side of the work material. Drive the nail perpendicular to the grain to reduce risk of injury.

24. **DO NOT DRIVE NAILS** onto the heads of other fasteners. Do not use the tool at too steep of an angle. Personal injury from strong recoil, jammed fasteners, or ricocheted nails may result.

25. **BE AWARE** of material thickness when using the nailer. A protruding nail may cause injury.

SAFETY RULES

26. **KNOW** that when the tool is being utilized at pressures on the high end of its operating range, nails can be driven completely through thin or very soft work material. Make sure the pressure in the compressor is set so that nails are set into the material and not pushed completely through.

27. **KEEP HANDS AND BODY PARTS CLEAR** of immediate work area. Hold workpiece with clamps when necessary to keep body parts out of potential harm. Be sure the workpiece is properly secured before pressing the nailer against the material. The contact trip may cause the work material to shift unexpectedly.

28. **DO NOT USE THE TOOL** in the presence of flammable dust, gases or fumes. The tool may produce a spark that could ignite gases causing a fire. Driving a nail into another nail may also cause a spark.

29. **KEEP FACE AND BODY PARTS** away from the back of the tool cap when working in restricted areas. Sudden recoil can result in impact to the body, especially when nailing into hard or dense material.

30. **GRIP THE TOOL FIRMLY** to maintain control while still allowing it to recoil away from the work surface as the fastener is driven. In bump action mode (contact actuation mode), allowing the contact trip to recontact the work surface before the trigger is released will fire an unwanted fastener.

31. **KEEP ALERT.** Watch what you are doing. Use common sense. Do not operate any tool when you are tired.

32. **USE PROPER EXTENSION CORDS.** When using an air compressor outdoors, use only rounded jackets extensions cords. These are intended for outside use. See manufacturer's manual for the AWG required for the compressor's amperage draw.

33. **PAY ATTENTION TO AIR HOSE AND THEIR CONNECTIONS.** Don't trip over the hoses. It isn't fun. Also, make sure the connections are nice and tight.

34. **WHEN CONNECTING TO THE AIR SUPPLY,** the tool is at risk of possibly firing fasteners. Be aware of this and do not aim the gun at anything you do not want to shoot a nail into.

35. **DO NOT DEPRESS THE CONTACT TRIP OR THE TRIGGER WHEN LOADING.**


36. **IF THE FASTENERS ARE JAMMED,** disconnect the tool from the air supply first before removing the jammed fasteners.

37. This tool is equipped with safe bracket that can adjust the depth of the driver. When adjusting the depth of the driver, first disconnect the tool from the air and rotate nut by thumb to satisfactory position.

38. **DO NOT** attempt to fire into hard or brittle materials such as concrete, steel or tile.

WARNING: The warnings, cautions, and instructions explained in this manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that **COMMON SENSE AND CAUTION ARE FACTORS WHICH CANNOT BE BUILT INTO THIS PRODUCT, BUT MUST BE SUPPLIED BY THE OPERATOR.** So don't do anything stupid.

GET TO KNOW YOUR AIR NAILER

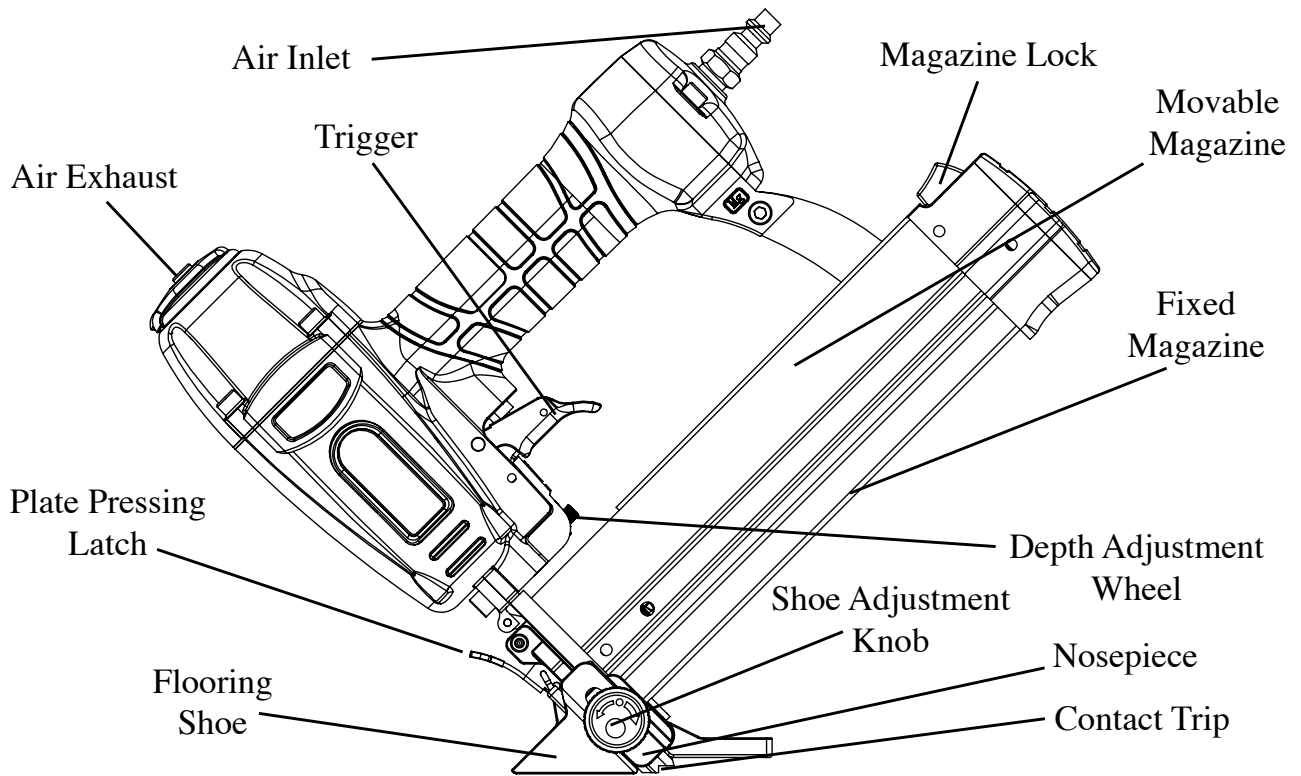

ASSEMBLY

UNPACKING

Be sure to remove all loose parts from the packaging. Refer to the table to the right and check all the parts are complete. If you find any pieces that are missing or wrong, please contact our customer service.

PART	QTY
Combination Nailer/Stapler	1
S3 Hex Key	1
S4 Hex Key	1
Air Tool Oil	1
Manual	1

Your air tool is fully assembled when you receive it.

Before using it, attach the air line and desired air system accessories. See Fig. 1 for the recommended accessories and connection order. Be sure the air hose is depressurized when installing or removing adapters to the air line.

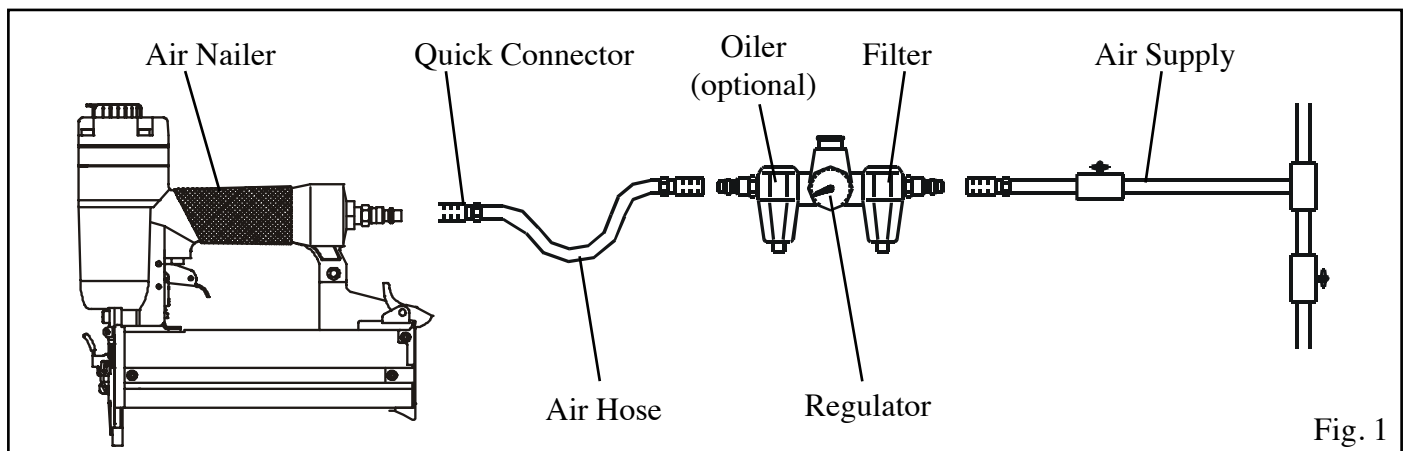


Fig. 1

ASSEMBLY

LUBRICATION

This tool requires lubrication before each use (especially the first use). If an inline oiler is used, manual lubrication through the air inlet is not required.

Note: The work surface can become damaged by excessive lubrication. Proper lubrication is the owner's responsibility. Failure to lubricate the tool properly will dramatically shorten the life of the tool and void the warranty.

1. Disconnect the air supply from the tool to add lubricant.
2. Turn the tool so the air inlet is facing up. Place 2 drops of oil into the air inlet (Fig. 2).
3. After adding oil, briefly run the tool. Wipe off any excess oil from the exhaust.

LOADING THE FASTENERS (Fig. 3)

NOTE: Always load the fasteners prior to connecting the tool to a power supply. Otherwise, unwanted misfires may occur.

1. Depress the Lock (Fig. 3 - 1) to release the Movable Magazine (Figure 3 - 2) and pull the magazine out fully.
2. Place a full clip of the specified type and size fasteners on the Fixed Magazine (Fig. 3 - 3), 100 fasteners may be loaded in the magazine.
3. Push the Movable Magazine Assembly (Fig. 3 - 2) forward until it is locked.

CONNECTING THE TOOL TO AN AIR SUPPLY

NOTE: Make sure that the tip of the nailer is pointed away from you when connecting to an air supply. Do not operate when the air pressure is outside of the recommended range (60 to 100 PSI).

1. Determine if the tool needs oil and, if necessary, place two drops of oil in the air inlet (Fig. 2 - 1) as outlined above in the Lubrication section.
2. Turn the compressor on and set the Regulator (Fig. 1 - Regulator) to the proper pressure according to the size and type of fastener being used. The air pressure range should be within 60 PSI to 100 PSI.
3. Connect the tool to the Air Supply (Fig. 1).

ADJUSTING THE DEPTH ADJUSTMENT WHEEL

Use the Depth Adjustment Wheel (Fig. 4) found directly underneath the trigger to adjust the depth of the fired nails. Turn the wheel to the left for deeper nails, or turn to the right for shallower nails.

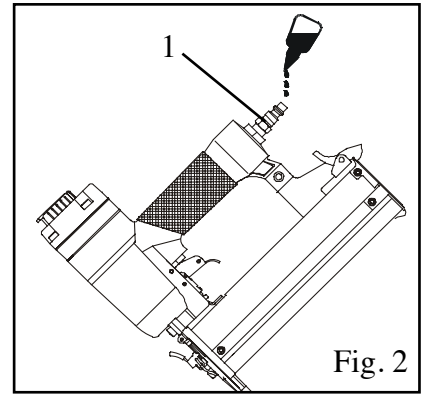


Fig. 2

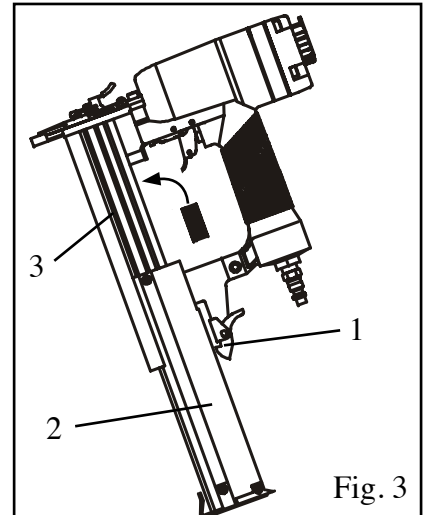


Fig. 3

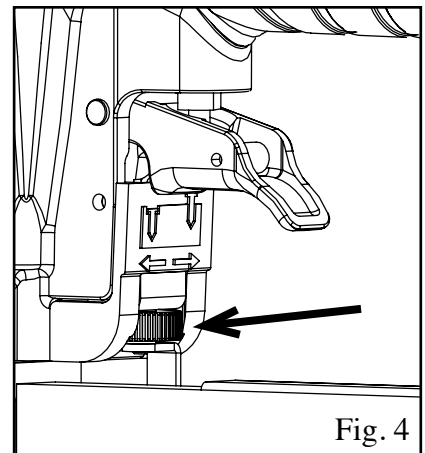


Fig. 4

OPERATION

Test the driving depth in a sample piece of wood before using. If the fasteners are being driven too far or not far enough, adjust the regulator to provide less air pressure or more air pressure.

1. Check that the air supply is correctly connected to the tool at the correct pressure and the fasteners have been loaded into the magazine.

2. Hold the nailer and press the drive guide (Fig. 5 - 1) flush against the work surface, making sure that the tool is straight. Gently press the trigger (Fig. 5 - 2) to drive the fastener.

DRIVING MODES

The tool has two driving modes. In order to operate the tool, both the contact trip and the trigger switch must be activated.

Single Driving Mode: put the driving guide on the work surface, making sure the contact trip is being pressed down. Then pull the trigger to drive a fastener.

Continuous Driving Mode: hold down the trigger. Repeatedly impact the contact trip against the working surface to drive the fasteners. The tool will drive one fastener every time the contact trip is activated.

CLEARING JAMMED NAILS




WARNING: disconnect air line from the tool and remove all fasteners before removing jammed nails to avoid personal injury.

If a nail becomes jammed in the nosepiece, keep the tool pointed away from yourself and others and follow these steps:

1. Disconnect air supply from tool.
2. Press magazine lock to release movable magazine.
3. Push down jam clearing latch and pull up to open front plate.
4. Remove jammed nail, using pliers or other tools if necessary.
5. If the piston assembly is in the down position, insert screwdriver or other rod into nosepiece and push the piston back in position.
6. Remove rod and close front plate.
7. Lift latch to secure front plate to nosepiece. Make sure the trigger and contact trip move freely without sticking or binding.
8. Load the magazine.
9. Reattach nailer to air supply. Test fire a nail into scrap wood to confirm the nailer is working properly again.



NOTE: If nails continue to jam in the nosepiece, have your tool serviced by an authorized WEN service center.

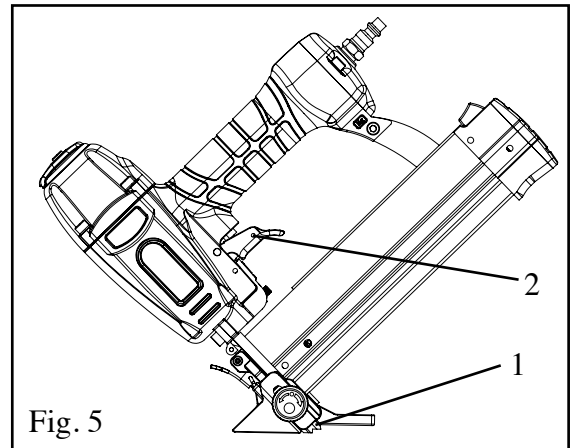

OPERATION



WARNING: Never uninstall or install the flooring shoe while the nailer/stapler is attached to its air supply or while nails are loaded in the magazine.

REMOVING THE FLOORING SHOE

For general installation at a 90-degree angle, use the following directions to uninstall the flooring shoe.

1. Open the plate pressing latch (Fig. 6).
2. Remove the O-Ring on the pin (Fig. 7 - A). Tweezers or a small flathead screwdriver are the best ways of removing the O-Ring from the pin.
3. Remove the pin from the floor shoe (Fig. 7 - B).
4. Slide the flooring component off (Fig. 8).
5. Close the plate pressing latch (Fig. 9).

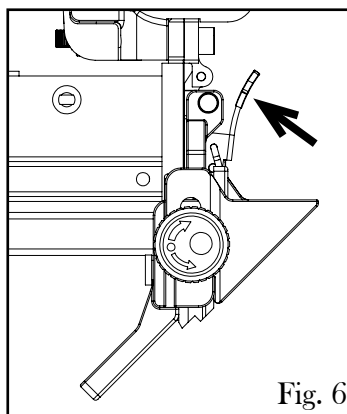


Fig. 6

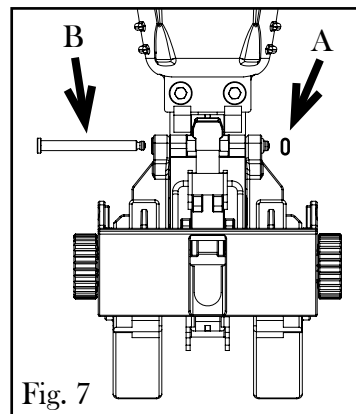


Fig. 7

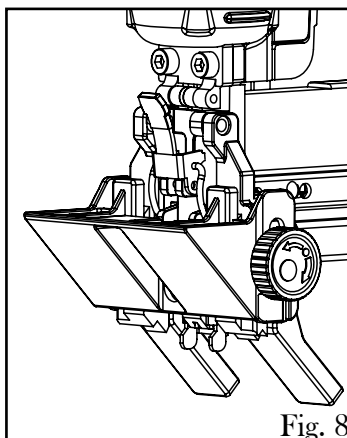


Fig. 8

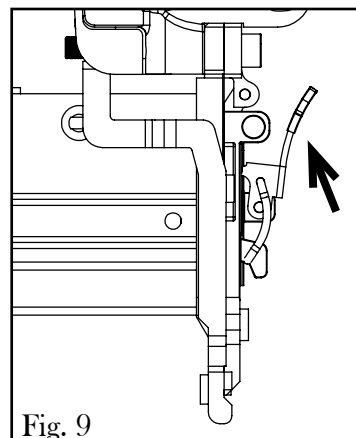


Fig. 9

INSTALLING THE FLOORING SHOE

1. Open the plate pressing latch (Fig. 9).
2. Attach the flooring shoe in place using the pin and O-Ring (Fig. 7).
3. Close the plate pressing latch (Fig. 6).

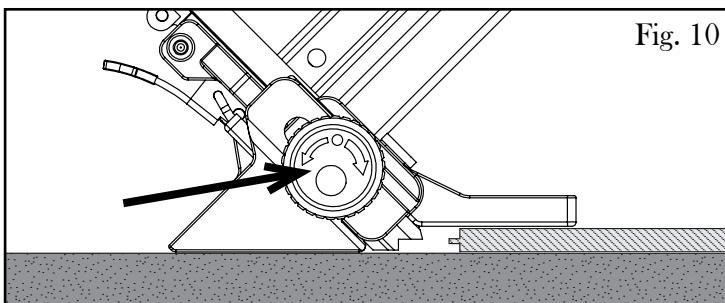


Fig. 10

USING THE FLOORING SHOE

1. Turn the depth adjustment wheel (Fig. 4) to set the depth of the fired nail. For flooring, it is suggested to always fire at the deepest depth.
2. Loosen the shoe adjusting knobs on either side of the shoe (Fig. 10) so that the flooring shoe adjusts to meet the needs of the contact piece.
3. Place the contact piece on top of the hardwood flooring. Push the nailer towards the hardwood (Fig. 11).
4. Place the nose tip flush with the corner tongue of the hardwood flooring. Once you are sure that the contact piece is flush with the hardwood, fasten the adjusting knobs in place.
5. Pull the trigger so that the fastener is fired at an angle through the hardwood and into the ground (Fig. 12).

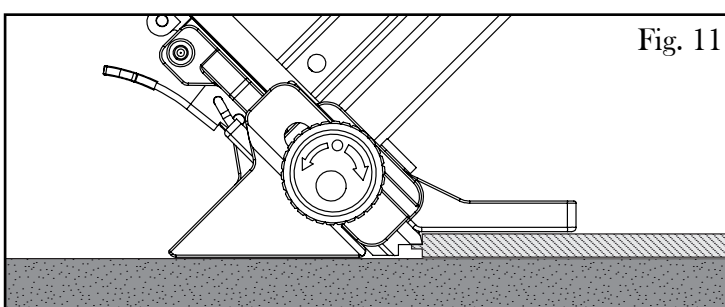


Fig. 11

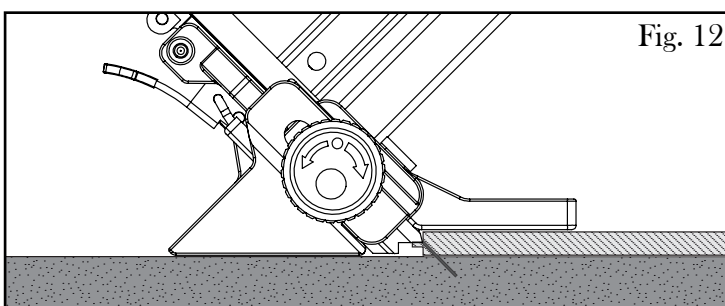


Fig. 12

TROUBLE SHOOTING

Stop using the tool immediately if any of the following problems occur. Serious personal injury could occur. Any repairs or replacements must be done by a qualified person or an authorized service center only.

PROBLEM	CAUSE	SOLUTION
Air leaking at trigger area	<ol style="list-style-type: none"> 1. O-ring in trigger valve is damaged. 2. Trigger valve head is damaged. 3. Trigger valve stem, seal or O-ring is damaged. 	<ol style="list-style-type: none"> 1. Check and replace O-ring. 2. Check and replace trigger valve head. 3. Check and replace trigger valve stem, seal or O-ring.
Air leaking between body and drive guide	Damaged piston O-ring or bumper.	Check and replace O-ring or bumper.
Air leaking between body and cylinder cap.	<ol style="list-style-type: none"> 1. Screw loose. 2. Damaged gasket. 	<ol style="list-style-type: none"> 1. Tighten screws. 2. Check and replace seal.
Blade driving fastener too deep	<ol style="list-style-type: none"> 1. Worn bumper. 2. Air pressure is too high. 	<ol style="list-style-type: none"> 1. Replace bumper. 2. Adjust the air pressure.
Runing slowly or has power loss	<ol style="list-style-type: none"> 1. Insufficient oil. 2. Insufficient air supply. 3. Broken spring in cylinder cap. 4. Exhaust port in cylinder cap is blocked. 	<ol style="list-style-type: none"> 1. Lubricate as instructed. 2. Check air supply. 3. Replace spring. 4. Replace damaged internal parts.
Tool skips a fastener	<ol style="list-style-type: none"> 1. Worn bumper or damaged spring (72). 2. Dirt in drive guide. 3. Inadequate airflow to tool. 4. Worn or dry O-ring on piston. 5. Damaged O-ring on trigger valve. 6. Cylinder cap seal leaking. 	<ol style="list-style-type: none"> 1. Replace bumper or pusher spring. 2. Clean drive channel of front plate. 3. Check hose and compressor fittings. 4. Replace O-ring or lubricate. 5. Replace O-ring. 6. Replace seal.
Fasteners are jammed	<ol style="list-style-type: none"> 1. Joint guider is worn. 2. Fasteners are the wrong size or damaged. 3. Magazine or front plate screws are loose. 4. Blade in piston assembly is damaged. 	<ol style="list-style-type: none"> 1. Replace joint guider. 2. Use the recommended and undamaged fasteners. 3. Tighten screws. 4. Replace piston assembly.


MAINTENANCE

WARNING: Remove nails from magazine and disconnect the pneumatic air supply before performing any maintenance.

Routine lubrication of the tool is required for best performance. Oil added through the airline connection will lubricate internal parts. An automatic airline oilier is recommended but oil may be added manually before every operation or after about 1 hour of continuous use. Only a few drops of oil at a time are necessary. Too much oil will collect inside the tool and be blown out during the exhaust cycle. **ONLY USE PNEUMATIC TOOL OIL.** Do not use detergent oil or additives, as these lubricants will cause accelerated wear to the seal in the tool.

Dirt and water in the air supply are major causes of pneumatic tool wear. Use a filter/oiler for better performance and longer lifetime for your tool. The filter must have adequate flow capacity for the specific application. Consult the manufacturer's instructions for proper maintenance of your filter. Keep tools clean for better and safer performance. Use nonflammable cleaning solutions only if necessary (**CAUTION:** Such solutions may damage O-ring and other tool parts). **DO NOT SOAK THE TOOL.**

EXPLODED VIEW AND PARTS LIST

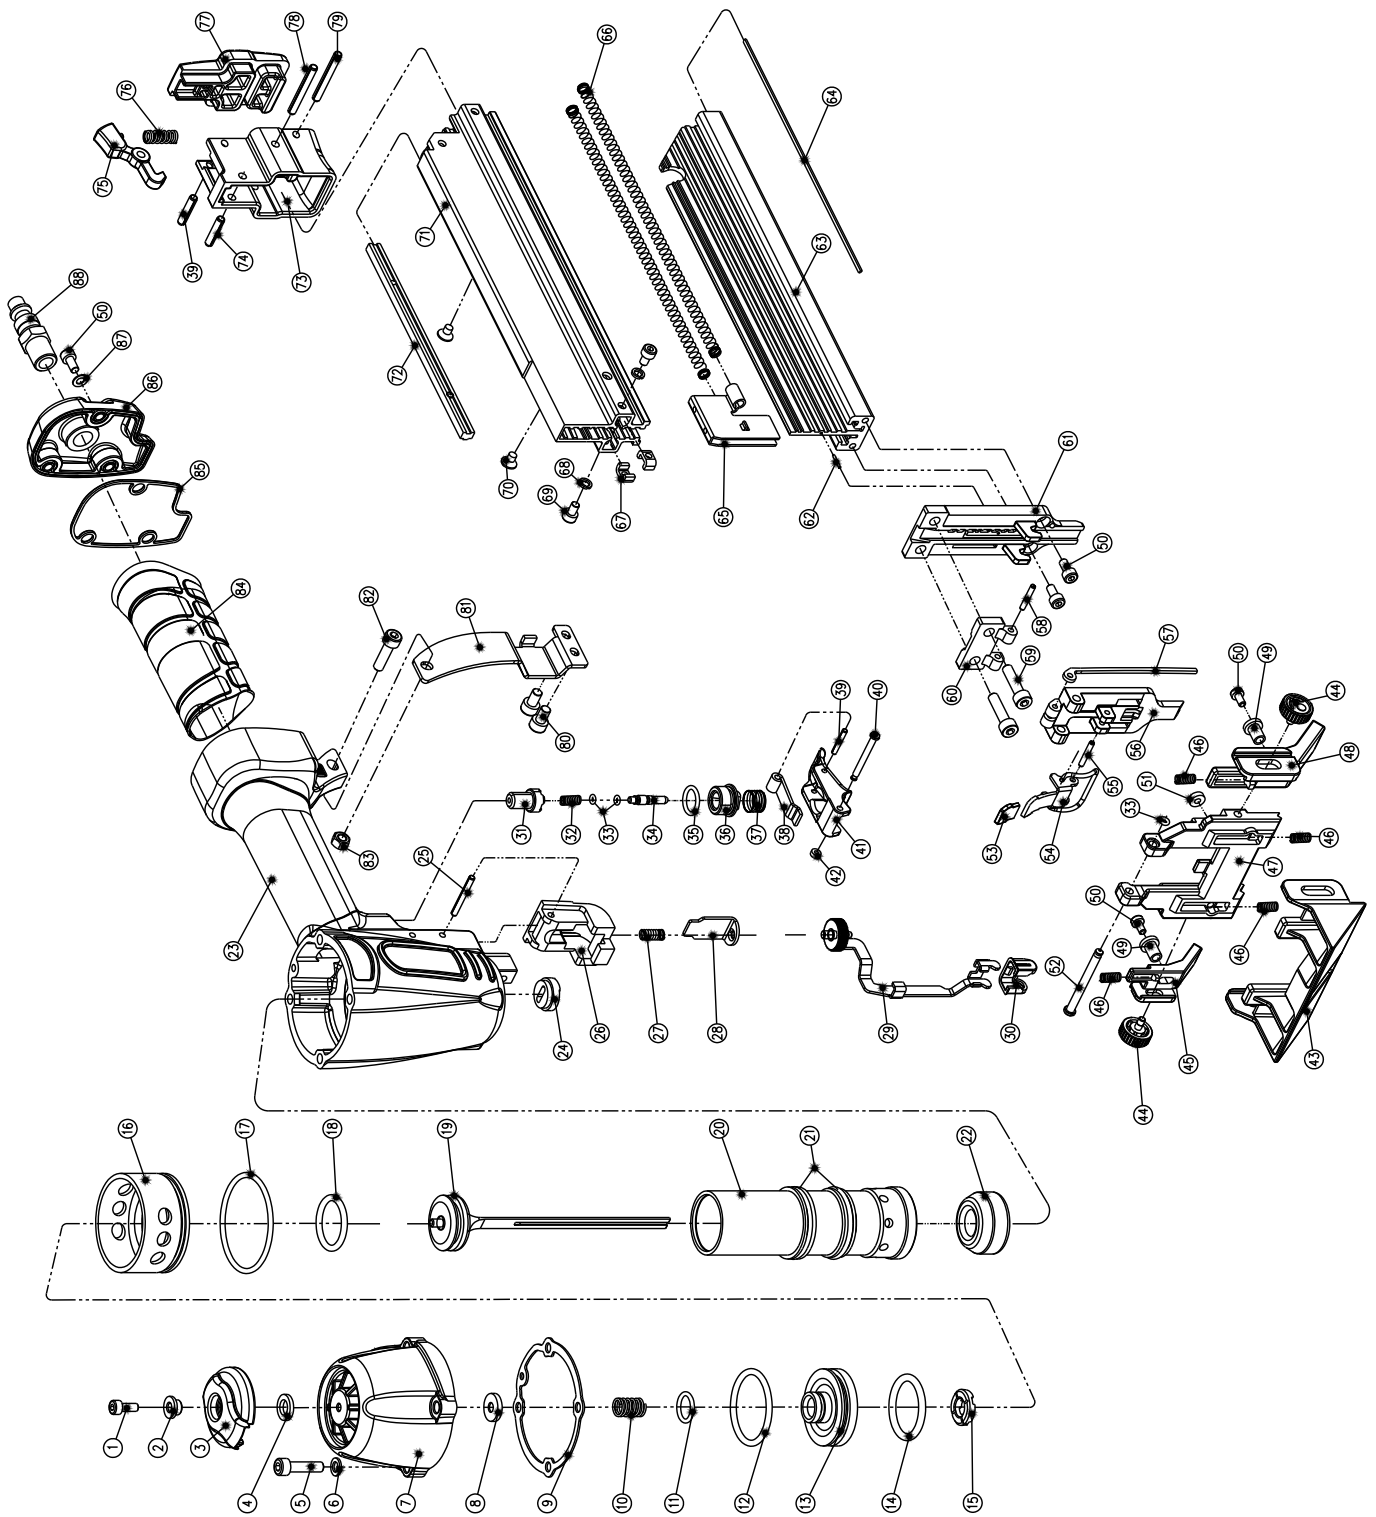

EXPLODED VIEW AND PARTS LIST

No.	Part Number	Description	Item	Part Number	Description
1	61741-001	Screw	45	61741-045	Right Slider
2	61741-002	Bushing	46	61741-046	Spring
3	61741-003	Exhaust Cover	47	61741-047	Cover Plate B
4	61741-004	Seal	48	61741-048	Left Slider
5	61741-005	Screw	49	61741-049	Bushing
6	61741-006	Washer	50	61741-050	Screw
7	61741-007	Cylinder Cap	51	61741-051	Seal
8	61741-008	Valve Seal	52	61741-052	Pin
9	61741-009	Gasket	53	61741-053	Rubber Sleeve
10	61741-010	Spring	54	61741-054	Latch Assembly
11	61741-011	O-Ring	55	61741-055	Spring Pin
12	61741-012	O-Ring	56	61741-056	Cover Plate A
13	61741-013	Valve	57	61741-057	Gibblock
14	61741-014	O-Ring	58	61741-058	Spring Pin
15	61741-015	Stopped Washer	59	61741-059	Screw
16	61741-016	Collar	60	61741-060	Spacer
17	61741-017	O-Ring	61	61741-061	Drive Guide
18	61741-018	O-Ring	62	61741-062	Pin
19	61741-019	Piston Assembly	63	61741-063	Fixed Magazine
20	61741-020	Cylinder	64	61741-064	Rail
21	61741-021	O-Ring	65	61741-065	Feeder Shoe
22	61741-022	Bumper	66	61741-066	Spring
23	61741-023	Body	67	61741-067	Block
24	61741-024	Joint Guide	68	61741-068	Spring Washer
25	61741-025	Spring Pin	69	61741-069	Screw
26	61741-026	Safety Guide	70	61741-070	Screw
27	61741-027	Spring	71	61741-071	Movable Magazine
28	61741-028	Safety Bracket A	72	61741-072	Panel
29	61741-029	Safety Bracket Assembly	73	61741-073	Magazine Plate
30	61741-030	Rubber Cover	74	61741-074	Spring Pin
31	61741-031	Trigger Valve Head	75	61741-075	Lock
32	61741-032	Spring	76	61741-076	Spring
33	61741-033	O-Ring	77	61741-077	Rubber Pad
34	61741-034	Trigger Valve Stem	78	61741-078	Spring Pin
35	61741-035	O-Ring	79	61741-079	Spring Pin
36	61741-036	Trigger Valve Guider	80	61741-080	Screw
37	61741-037	Spring	81	61741-081	Support
38	61741-038	Trigger Spring	82	61741-082	Screw
39	61741-039	Spring Pin	83	61741-083	Nut
40	61741-040	Pin	84	61741-084	Soft Grip Sleeve
41	61741-041	Trigger	85	61741-085	End Cap Gasket
42	61741-042	Washer	86	61741-086	End Cap
43	61741-043	Slider	87	61741-087	Washer
44	61741-044	Adjusting Knob	88	61741-088	Air Plug

LIMITED TWO YEAR WARRANTY

WEN Products is committed to build tools that are dependable for years. Our warranties are consistent with this commitment and our dedication to quality.

LIMITED WARRANTY OF WEN CONSUMER POWER TOOLS PRODUCTS FOR HOME USE
GREAT LAKES TECHNOLOGIES, LLC (“Seller”) warrants to the original purchaser only, that all WEN consumer power tools will be free from defects in material or workmanship for a period of two (2) years from date of purchase. Ninety days for all WEN products, if the tool is used for professional use.

SELLER’S SOLE OBLIGATION AND YOUR EXCLUSIVE REMEDY under this Limited Warranty and, to the extent permitted by law, any warranty or condition implied by law, shall be the repair or replacement of parts, without charge, which are defective in material or workmanship and which have not been misused, carelessly handled, or misrepaired by persons other than Seller or Authorized Service Center. To make a claim under this Limited Warranty, you must make sure to keep a copy of your proof of purchase that clearly defines the Date of Purchase (month and year) and the Place of Purchase. Place of purchase must be a direct vendor of Great Lakes Technologies, LLC. Third party vendors such as garage sales, pawn shops, resale shops, or any other secondhand merchant void the warranty included with this product. Contact techsupport@wenproducts.com or 1-800-232-1195 to make arrangements for repairs and transportation.

When returning a product for warranty service, the shipping charges must be prepaid by the purchaser. The product must be shipped in its original container (or an equivalent), properly packed to withstand the hazards of shipment. The product must be fully insured with a copy of the warranty card and/or the proof of purchase enclosed. There must also be a description of the problem in order to help our repairs department diagnose and fix the issue. Repairs will be made and the product will be returned and shipped back to the purchaser at no charge.

THIS LIMITED WARRANTY DOES NOT APPLY TO ACCESSORY ITEMS THAT WEAR OUT FROM REGULAR USAGE OVER TIME INCLUDING BELTS, BRUSHES, BLADES, ETC.
ANY IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO ONE (1) YEAR FROM DATE OF PURCHASE. SOME STATES IN THE U.S., SOME CANADIAN PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS) ARISING FROM THE SALE OR USE OF THIS PRODUCT. SOME STATES IN THE U.S. AND SOME CANADIAN PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE IN THE U.S., PROVINCE TO PROVINCE IN CANADA AND FROM COUNTRY TO COUNTRY.

THIS LIMITED WARRANTY APPLIES ONLY TO PORTABLE ELECTRIC TOOLS, BENCH POWER TOOLS, OUTDOOR POWER EQUIPMENT AND PNEUMATIC TOOLS SOLD WITHIN THE UNITED STATES OF AMERICA, CANADA AND THE COMMONWEALTH OF PUERTO RICO. FOR WARRANTY COVERAGE WITHIN OTHER COUNTRIES, CONTACT THE WEN CUSTOMER SUPPORT LINE.

THANKS FOR REMEMBERING

