

DURABASE® Square Shower Floors

Single Threshold



- Sturdy, 1-Piece Molded Fiberglass Construction — ribbed underbody for extra strength, slip resistant surface
- Integral molded drain with seal for connection to 2" Sch. #40 ABS, PVC or iron DWV sanitary drain pipe. See optional drain seal for 1-1/2" pipe and 2" copper — removable strainer
- Available in White, Biscuit and Bone
- Semi-gloss Surface — resistant to mold and mildew, easy to clean
- Designed to be used with Mustee's DURAWALL® Shower Walls, Ceramic Tile or Preformed Wall Kit

Code Accepted



DURABASE® Shower Floors meet or exceed performance requirements:

- IAPMO® Listed — file numbers: Shower Floor — #1453; Drain — #1251 and #1635
- HUD/FHA — UM-73
- American National Standards Institute (ANSI) — Specification Z124.2
- Warnock Hersey Listed — CSA test standards: Shower Floor — #B45.0 and #B45.5
- American Society of Testing & Materials (ASTM) — D 635, E 84 and E 162



Model No.	Nom. Size	Color	UPC	A	B	C	D
3232M	32"x32"	White	6 71031 00078 1	32"	32"	16"	16"
3232BN	32"x32"	Bone	6 71031 00075 0	32"	32"	16"	16"
3434M	34"x34"	White	6 71031 00101 6	34"	34"	17"	17"
3636M	36"x36"	White	6 71031 00148 1	36"	36"	18"	18"
3636BN	36"x36"	Bone	6 71031 00136 8	36"	36"	18"	18"
3636BT	36"x36"	Biscuit	6 71031 00350 8	36"	36"	18"	18"
4242M	42"x42"	White	6 71031 00334 8	42"	42"	21"	21"
4242BN	42"x42"	Bone	6 71031 00335 5	42"	42"	21"	21"

Sectional View

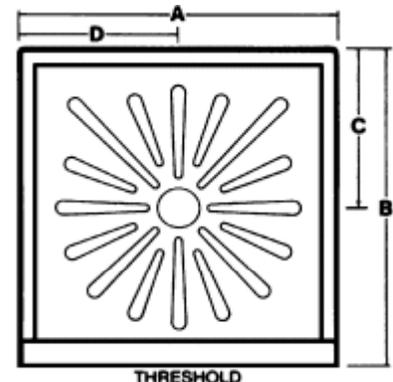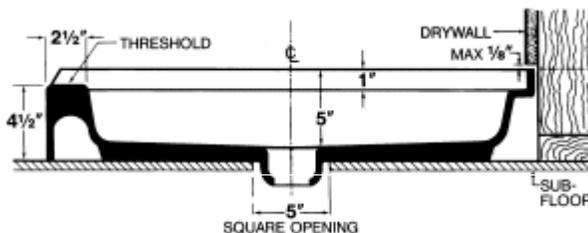

General: Furnish and install as shown on plans DURABASE® Shower Floor model _____, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size _____ x _____. Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4-1/2" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40), PVC or ABS sanitary drain pipe. Removable strainer. Color _____ (White, Bone, Biscuit). Install in compliance with local codes.