

▶ INSTALLATION

TV Mount Assembly



Congratulations! Now with a completed set up, as you swivel or pivot your TV left and right to the viewing area, your sound bar will move with it! Ensuring that the viewing area gets the best sound possible! Thank you and Enjoy!

AEON-90200

AEON
Stands & Mounts

MANUAL AEON-90200

AEON
Stands & Mounts



Sound Bar Bracket
with Depth Adjustment

INSTALLATION

TV Mount Assembly










Thank you for choosing the AEON-90200 Sound Bar Mount with depth adjustment. This awesome soundbar bracket is compatible with virtually every TV, TV wall mount and TV stand. Please read this user manual carefully in order to know its various functions and operational maintenance. AEON-90200 Sound Bar Mount with depth adjustment is one the most versatile Soundbar mounts on the market today. What makes this soundbar bracket so unique is its ability to adjust for not only height, but depth as well. This is what separates this soundbar mount from the conventional soundbar mounts, simple and effective depth adjustment for flush mounting. The AEON Soundbar mounting bracket makes virtually any soundbar look perfectly flush with the front edge of any flat screen TV, no matter how thick or thin the TV or soundbar is. Also being height adjustable ensures that the soundbar will be placed exactly where you want it: on the top or bottom edge of the TV, giving it a seamless, professional modern appearance. There are a few ways to mount the soundbar bracket: Directly to the TV or to a TV wall mount or stand. Follow these steps to determine which install is appropriate for you.




Hardware List

A. x4 Metal Washer 6	B. x4 Nylon Washer 8	C. x4 Socket Pan Head Screw M6x12	D. x1 4mm Allen Key	E. x1 6mm Allen Key	F. x2 Socket Pan Head Screw M8x16	G. x2 Cylinder Head Screw M8x45	H/I. x4 Slider Plate
--------------------------------	--------------------------------	---	-------------------------------	-------------------------------	---	---	--------------------------------

Parts List

Parts List		TV Mounting Screws(Cross Recess)				 N. x4 Metal Washer 6	
 1) x2	 2) x2					M6x13mm (x4 each) - J	 O. x4 Metal Washer 8
						M6x30mm (x4 each) - K	
						M8x13mm (x4 each) - L	
						M8x30mm (x4 each) - M	
 3) x2							

6 TV Mount Assembly

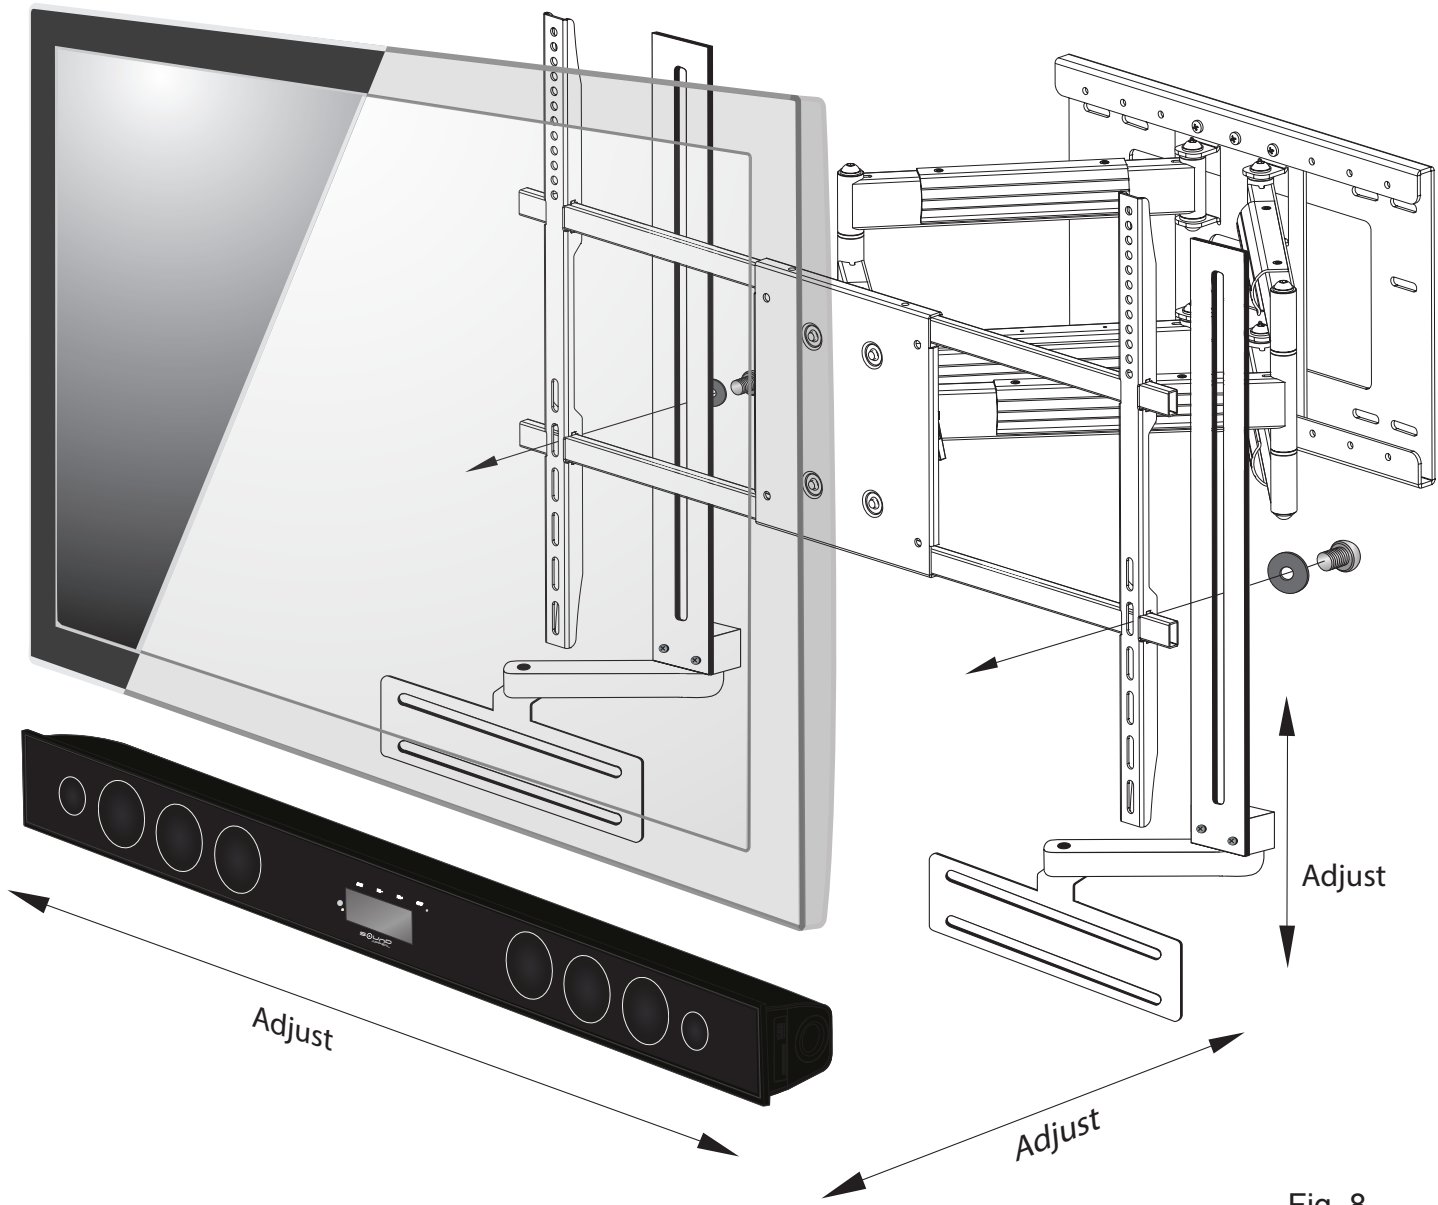

Attach the soundbar mount to your soundbar with screws provided by soundbar manufacturer and hand tighten (see figure 4). Make final adjustments of height and depth of soundbar on the bracket to match it perfectly with the front edge of the TV (See Fig 8). Further tighten all screws and bolts for a secure hold.

5 TV Mount Assembly

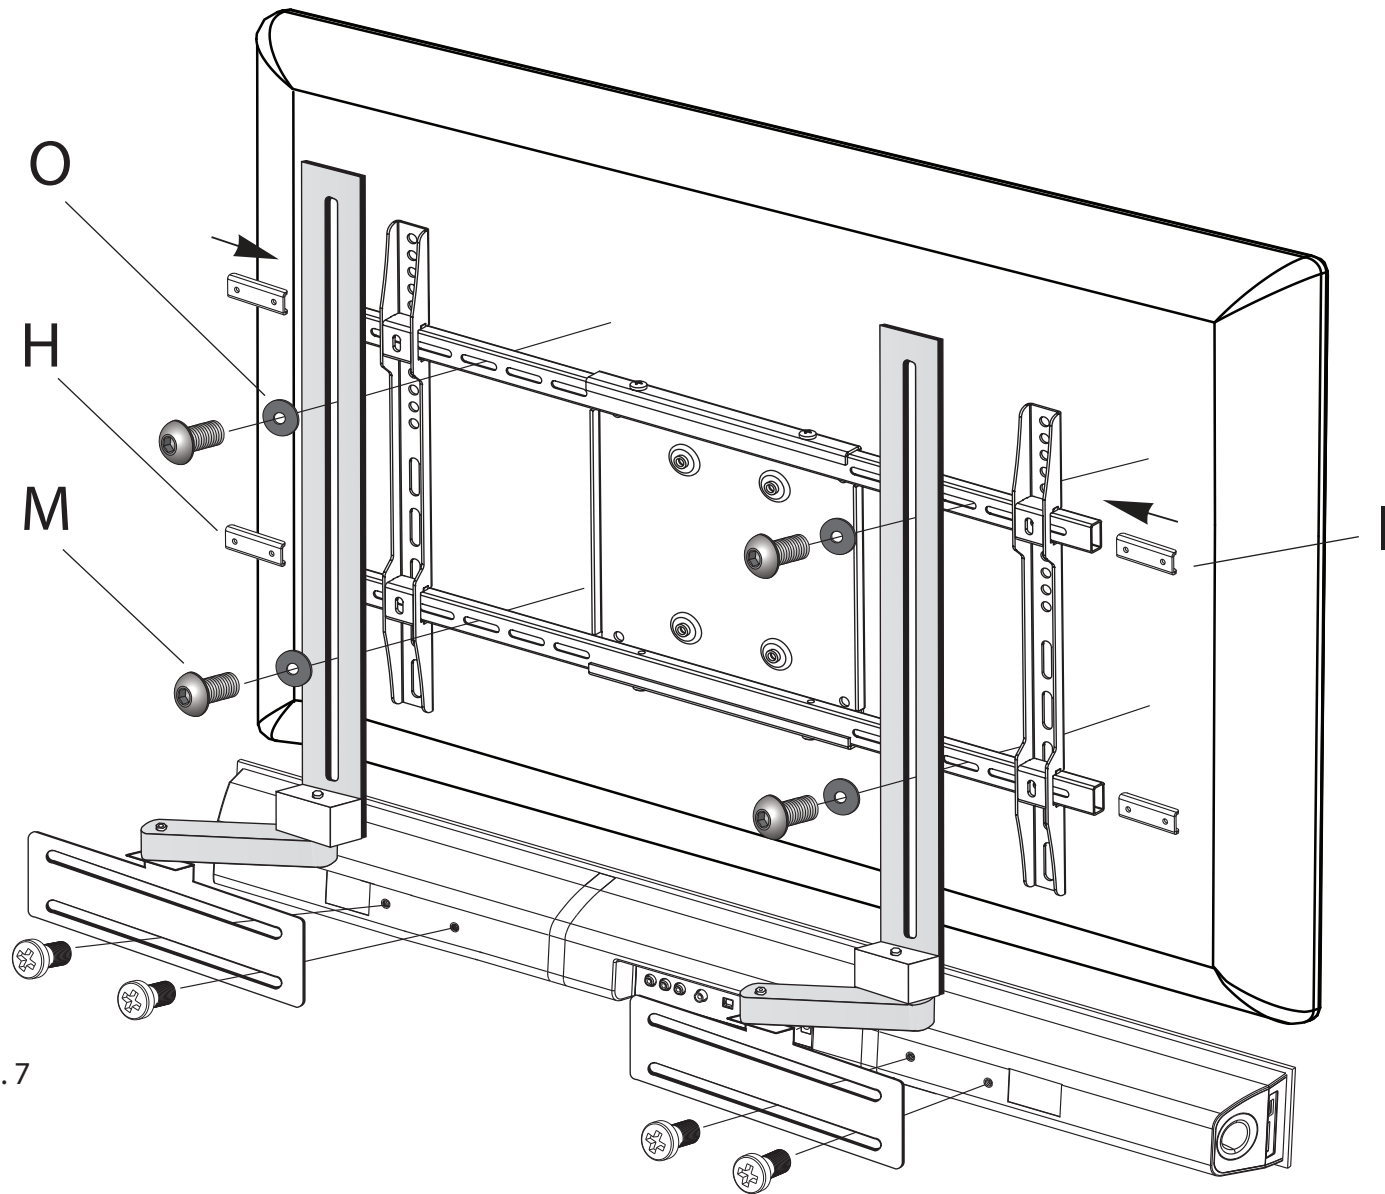


Fig. 7

The third way to install the AEON-90200 soundbar bracket is to affix it to the back of the TV wall mounts horizontal rails (See Fig. 7). This works best with the Aeon 45200, 40200, 40302 and 50101 TV mounts. These AEON TV wall mounts have dedicated locations in the back of the rails for the soundbar bracket to adhere to. With TV wall mount models AEON-45200, 40200 and 50101 the sound bar mount has specific included hardware that allows a direct attachment to the rails. It is more likely you will not have to remove the TV from the wall mount making installation much easier. Insert four slider plate (H/I) pieces into the outside opening of horizontal rails shown in Fig 7. (40302 will not require slider plates). If the vertical bars of the TV wall mount are placed far out to the sides of the horizontal rails, you may need to remove the TV from the wall mount. Remove the vesa screws of the vertical bars on the TV wall mount. Push the existing slider plate further to the inside of horizontal rails and place the new slider in the place of the old slider. Using screw (C x 4) and washer (B x 4) attach vertical bars of soundbar bracket to the sliders (H/I) in the horizontal rails.

1 Vertical Arms Assembly

Attach vertical arms (3) assembled with aluminum plate to extender arm (2) Using bolt (G) and Nylon Washer (B). 6mm Allen Key (E) and tighten. (May need to loosen bolts later to adjust for depth but tighten before final assembly). (See Fig.1)

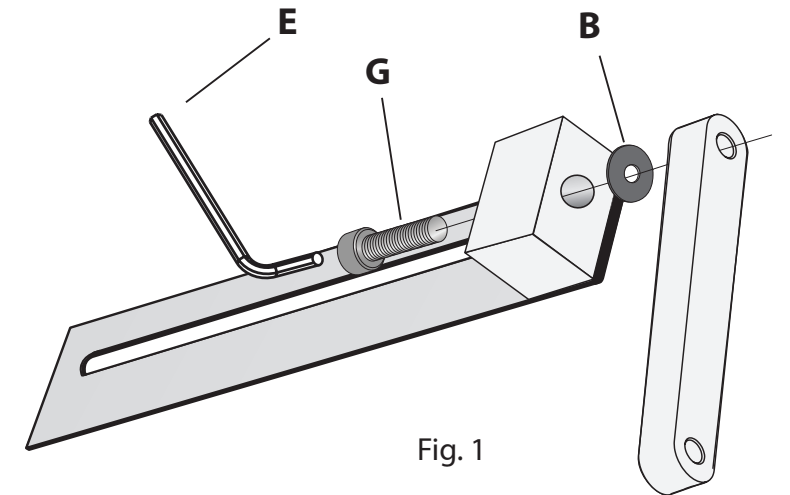


Fig. 1

2 Vertical Arms Assembly

Using Nylon Washer (B) and Cylinder Head Screw (F) slide through open end of extender arm (2) into Sound bar plate (1). 6mm Allen Key (E) and tighten. (May need to loosen bolts later to adjust for depth but tighten before final assembly). (See Fig.2)

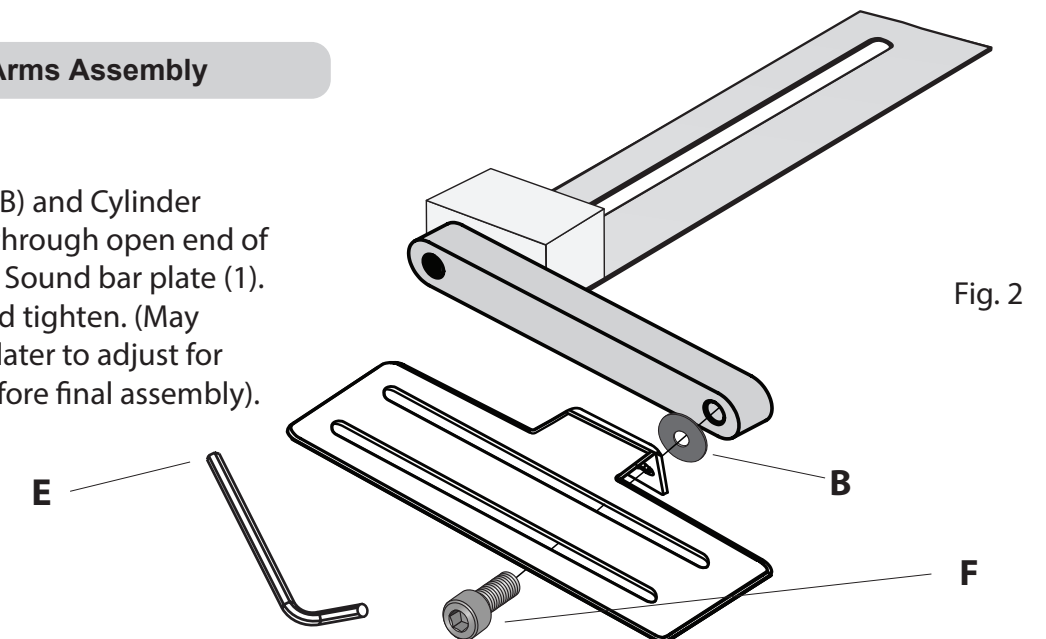


Fig. 2

Repeat steps 2 & 3 on second vertical arm. The solid build of this heavy duty steel soundbar mount will support over 40 pounds. The steel rails are treated with rough powder coating to prevent slippage of the soundbar so it will stay in the right place when mounted to your TV.

NOTE: Each of the following steps will require you to use the screws that were provided with the soundbar to attach it to this mount.

To install soundbar mount directly to a TV go to Step 3.

To install on existing TV wall mounts and stands go to Step 4.

To install on AEON 45200, 40200, 40302 or 50101 go to Step 5.

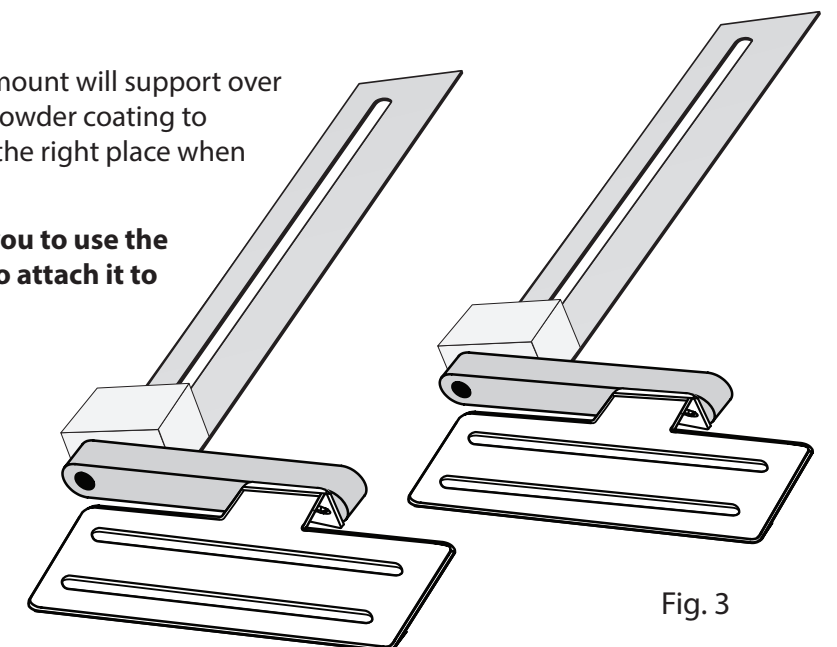


Fig. 3

3 Soundbar Mount Installation

Installation on Top of the TV

This step demonstrates the way to install the AEON-90200 Soundbar bracket directly to your TV. It is recommended to have the TV laying flat facing down if possible. This allows a quicker install and easier matching the front face of the soundbar with the front edge of your TV. You will need to match the vesa screws (part J, K, L or M) and washers (part N, or O) to the vesa holes on your TV. Determine the length screw you will need to go through the vertical bars of the Soundbar mount and be well seated in the TV screw hole. The included screws match most TV's.

You can choose to attach your soundbar directly below or above the TV. (See fig. 4/5) Align the sound bar bracket vertical bars (#3) with the screw holes located on the TV. (See figure 5). Using the vesa screws (part J, K, L or M) and washers (part N, or O) affix the sound bar bracket vertical bars (#3) to the vesa holes. Hand tighten as you may need to adjust for final height of the sound bar. Attach the soundbar plate (#1) to your soundbar with screws provided by soundbar manufacturer (see figure 4). Hand tighten as you may need to adjust for final position of the sound bar. Make final adjustments of height and depth of soundbar on the bracket to match it perfectly with the front edge of the TV. Further tighten all screws and bolts for a secure hold.

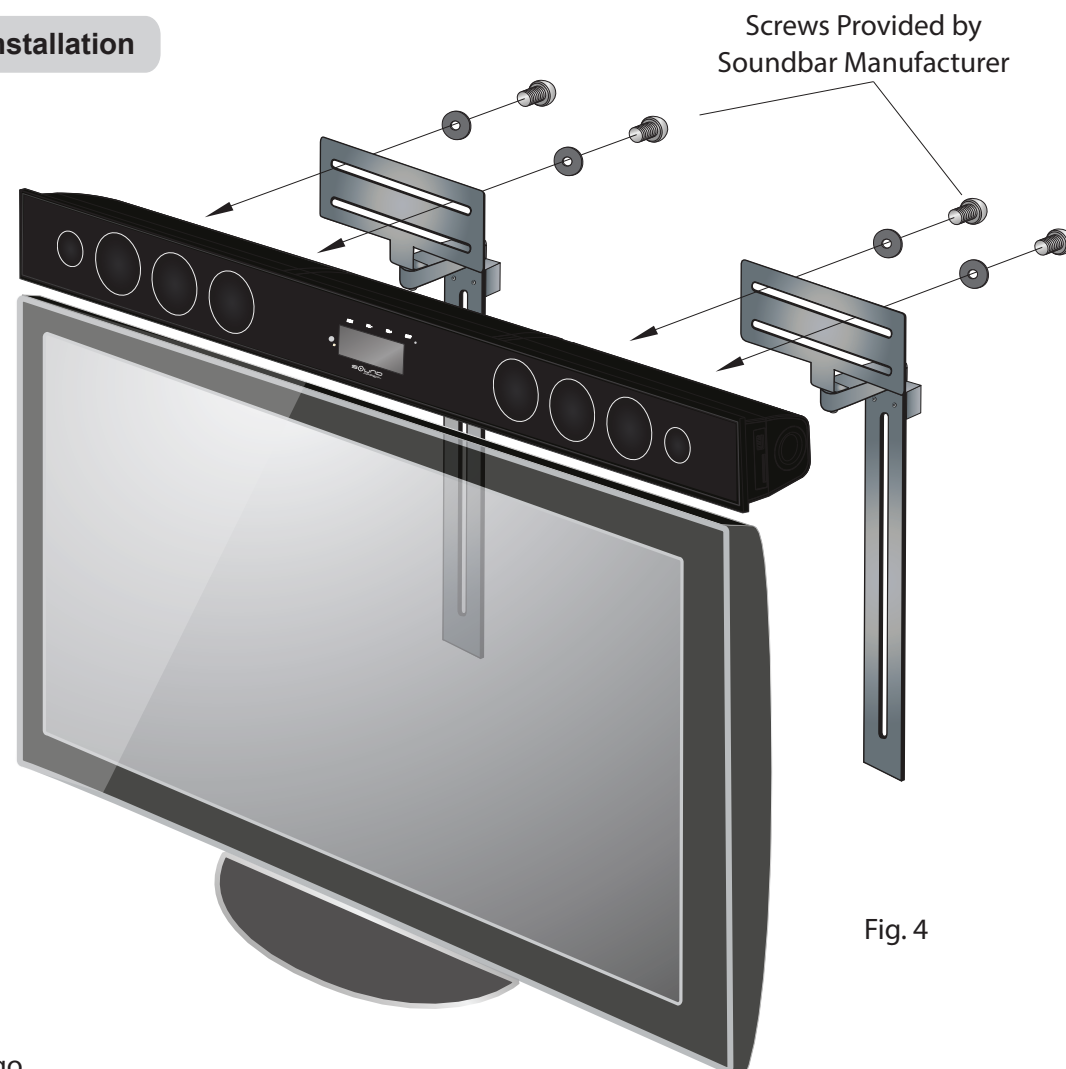


Fig. 4

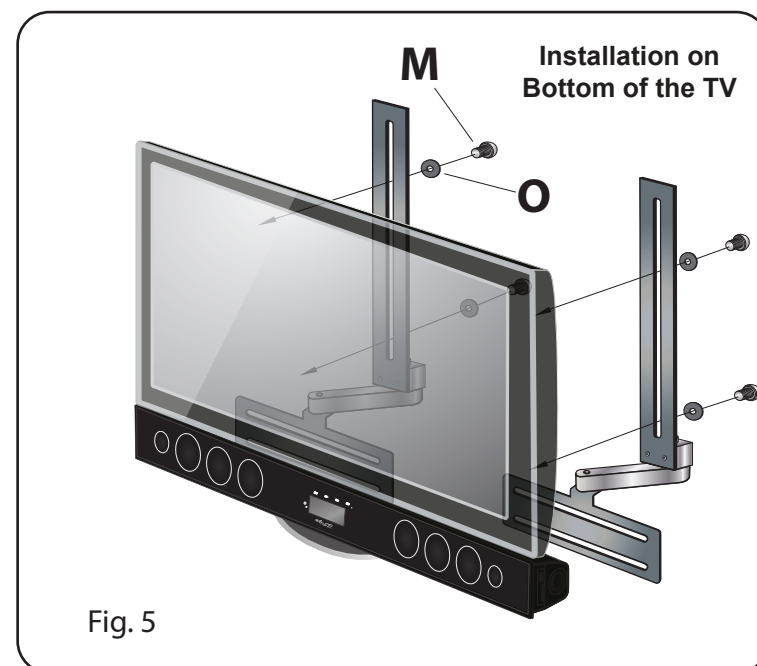


Fig. 5

4 TV Mount / Soundbar Mount Installation

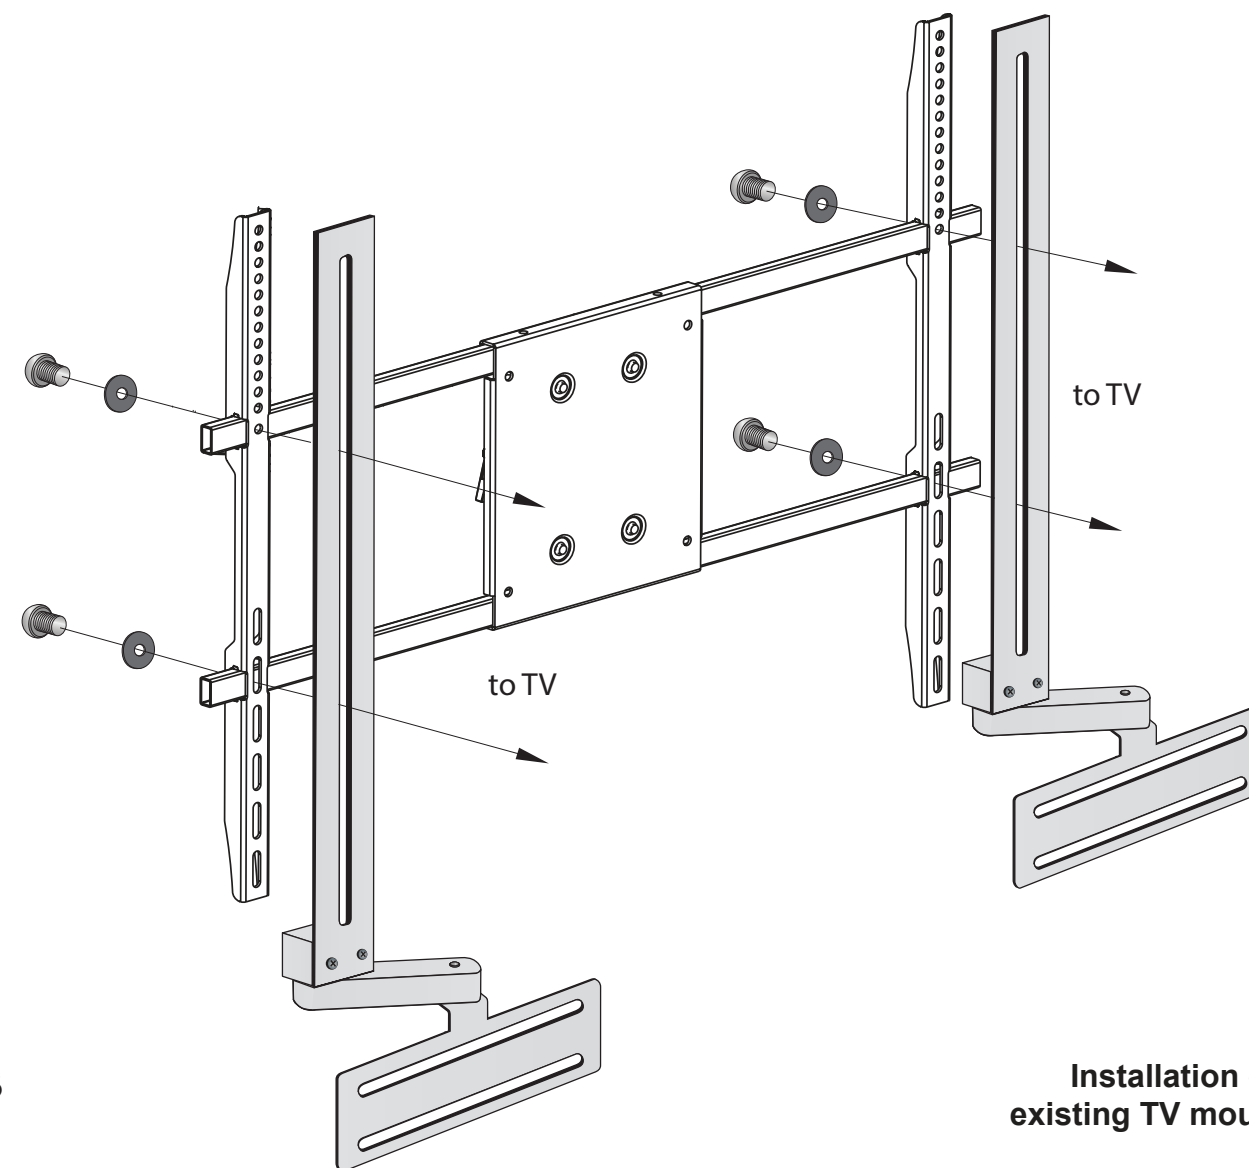


Fig. 6

Installation on existing TV mount

A second way to install the AEON-90200 soundbar bracket is to connect it to a TV wall mount or stand you already own. Place the vertical bars (#3) from the soundbar bracket between the TV and the wall mount assembly. You may need slightly longer vesa screws to reattach TV wall mount through your wall mount and the soundbar mount vertical bars into the TV. (See Fig. 6). First, remove the TV from the wall mount. It is recommended to have the TV laying flat facing down if possible. Align the sound bar bracket vertical bars with vesa screw holes located on the TV. With vesa screws, attach the TV wall mount through the vertical bars of the soundbar mount to the vesa screw holes on the back of the TV. Tighten, yet you may need to loosen slightly to adjust height of the soundbar mount. Attach the soundbar mount to your soundbar with screws provided by soundbar manufacturer (see figure 4). Tighten, yet you may need to adjust for final position of the sound bar. Make final adjustments of height and depth of soundbar on the bracket to match it perfectly with the front edge of the TV. Further tighten all screws and bolts for a secure hold.