



INNOVATIONS FOR LIVING®

R-30C EcoTouch® PINK® Fiberglas™ Insulation for 2x10 Cathedral Ceilings

Product Data Sheet



R-30C EcoTouch® Insulation Unfaced, Kraft faced

Excellent Thermal Control
Owens Corning™ R-30C EcoTouch® Thermal Batt insulation is designed to provide maximum thermal performance for cathedral ceiling applications. R-30C Thermal Batt EcoTouch® insulation is available unfaced or with a kraft vapor retarder.

Long Term In-Place Performance

R-30C EcoTouch® Thermal Batt insulation is dimensionally stable and will not slump within the cathedral ceiling cavity. Due to its inorganic nature, EcoTouch® Thermal Batt insulation will not rot or mildew and is non-corrosive to steel, copper and aluminum.

Sized for Proper Ventilation

R-30C EcoTouch® Thermal Batt insulation is designed to eliminate R-value loss caused by compressing standard R-30 products in 2x10 cathedral ceiling construction. 8¼" thick, R-30C EcoTouch® Thermal Batt insulation prevents moisture damage and helps assure long roof life by providing 1" of ventilation air space between the insulation and roof deck.

Easy Installation

R-30C EcoTouch® Thermal Batt insulation is easy to handle and install. Designed to friction-fit in standard 2x10 cathedral ceiling construction, R-30C EcoTouch® Thermal Batt insulation eliminates

Product Data R-30C EcoTouch® Thermal Batt Insulation

	Width	Length	Thickness	R-Value ¹
Cathedral Ceiling Construction	15½" (394mm) 23¾" (603mm)	48" (1,219mm)	8¼" (209mm)	30.0

1. The higher the R-value, the greater the insulating power. Ask your Owens Corning representative for the fact sheet on R-values. C Insulation for cathedral ceiling applications.

Available Vapor Retarder Facings

	Kraft
Max. by Volume	I

Water Absorption

Max. by Volume	Less than 5%
----------------	--------------

Dimensional Stability


Linear Shrinkage	Less than 0.1%
------------------	----------------

Surface Burning Characteristics/Building Code Construction Classifications

Products	Flame Spread	Smoke Developed	ICBO	BOCAI	SBCCI	ICC
Unfaced	<25	<50	All Types	All Types	All Types	All Types
Kraft-faced	N/R	N/R	III, IV, V	3,4,5	III, V, VI	III, IV, V


EcoTouch® Thermal batt insulation complies with Uniform Building Code (ICBO), National Building Code (BOCAI), Standard Building Code (SBCCI), and International Building Code (ICC) model code requirements for building construction types listed above. The kraft facing on thermal batt insulation will burn and must not be left exposed. Install facing in substantial contact with the finish material. Protect from open flame or other heat source.

9½", R-30 EcoTouch® Thermal Batt Insulation

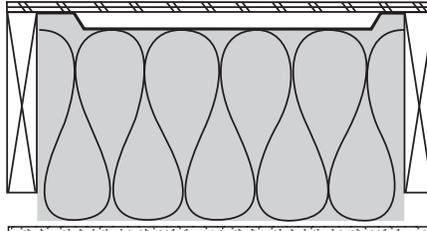

Standard Batts compressed into a 9¼" cavity with ventilation baffle added to allow 1" air space deliver approximately R-28.

8¼", EcoTouch® Thermal Batt Insulation

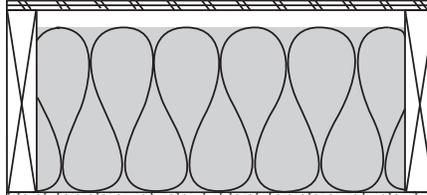

New R-30C batts provide the recommended ventilation air space when properly installed and deliver a full R-30.

the need, in most applications, for ventilation baffles. Trimming and fabrication can be done with an ordinary utility knife.

Technical Design Considerations

The kraft facing on this insulation will burn and must not be left exposed. Install facing in substantial contact with the finish material.

Read This Before You Buy

What you should know about R-Values

The chart shows the R-value of this insulation. R means resistance to heat flow. The higher the R-value, the greater the insulating power. Compare insulation R-values before you buy.

There are other factors to consider. The amount of insulation you need depends mainly on the climate, the type and size of your home, and your fuel use patterns and family size. If you buy too much insulation, it will cost you more than you'll save on fuel.

To get the marked R-value, it is essential that this insulation be installed properly.

Protect from open flame or other heat source.

Cathedral ceiling applications require that the building envelope block the movement of air from the outdoor environment to the conditioned space. Neither the insulation nor its facing should be relied upon to provide an air barrier.



INNOVATIONS FOR LIVING®

R-30C EcoTouch® PINK® Fiberglas™ Insulation for 2x10 Cathedral Ceilings

Product Data Sheet

Failure to provide an air barrier could lead to loss of thermal control, discomfort of the building occupants and frozen pipes.

Owens Corning recommends that a vapor retarder should be used in most climates. In climates requiring winter heating, the vapor retarder should be placed toward the warm-in-winter side. In humid climates, like the Gulf Coast, follow local building practices for vapor retarder placement. In all applications utilizing a vapor retarder, maintaining the facing integrity may be important for effective moisture/humidity control. Repair any punctures or tears in the facing by taping. Follow the tape manufacturer's application recommendations.

Insulation installed too close to light fixtures may affect the luminaire's performance. Do not install insulation on top of or within 3" of recessed light fixtures unless the fixtures are approved for such use. This is a requirement of the National Electric Code.

Installation

R-30C EcoTouch® Thermal Batt insulation is intended to be friction-fit between wood rafters. In applications with irregular spaced rafters, cut the batts approximately 1/2" wider than the space and friction fit them in place. Tightly abut batts to prevent thermal leaks.

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.

The GREENGUARD INDOOR AIR QUALITY CERTIFIED mark is a registered certification mark used under license through the GREENGUARD Environmental Institute.

ENERGY STAR and the ENERGY STAR mark are registered trademarks of the U.S. Environmental Protection Agency.

Provide vent openings at the eave and ridge. Cathedral ceiling insulation should be installed to provide a minimum 1" ventilation passageway between the roof deck and insulation. Use a vent baffle to assure proper clearance where necessary.

Applicable Standards

Unfaced R-30C EcoTouch® Thermal Batt insulation complies with ASTM C665, Type I and ASTM E136. Kraft-faced R-30C EcoTouch® Thermal Batt insulation complies with ASTM C665, Type II, Class C. Federal Specification HH-I-521F has been cancelled and is replaced by ASTM C665.

The thermal resistance value for R-30C EcoTouch® Thermal Batt insulation was tested in accordance with ASTM C518; R-value for insulation only.

The surface burning characteristics of R-30C EcoTouch® Thermal Batt insulation were derived from products tested in accordance with ASTM E84. This standard is used solely to measure and describe properties of products in response to heat and flame under controlled laboratory conditions. These numerical ratings are not intended to reflect hazards presented by this or any other material under actual fire conditions. Values are reported to the nearest five rating.

The vapor retarder permeance of the kraft facing on R-30C EcoTouch® Thermal Batt insulation was developed from tests conducted in accordance with ASTM E96, desiccant method.

Fiber Glass and Mold:

As manufactured, fiber glass insulation is resistant to mold growth. However, mold growth can occur on building materials, including insulation, when it becomes contaminated with organic material and when water is present. To avoid mold growth on fiber glass insulation, remove any water that has accumulated and correct or repair the source of that water as soon as possible. Insulation that has become wet should be inspected for evidence of residual moisture and contamination, and any insulation that is contaminated should be promptly removed and replaced.

Fiber glass insulation may cause temporary irritation to skin, eyes and respiratory tract. Wear long-sleeved, loose fitting clothing, gloves and safety glasses when handling and applying material. Wash with soap and water after handling. Wash work clothes separately and wipe out washer.



INNOVATIONS FOR LIVING®

OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659

1-800-GET-PINK®
www.owenscorning.com

Pub. No. 21150-D. Printed in U.S.A. June 2012. THE PINK PANTHER™ & ©1964-2012 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. ©2012 Owens Corning. All Rights Reserved.

